

CM9760-CXTA Coaxitron® Translator INTERFACE UNIT FOR COAXITRON-CAPABLE RECEIVERS

Product Features

- Allows Coaxitron® Control from Any RS-422 P or D Protocol Device
- 16 Looping Video Inputs Allow Easy Connection Between Switch and Cameras
- Send PTZ Control Commands Through a Camera's Video Cable
- Fits a Standard 19-Inch Rack Mount

The **CM9760-CXTA** interfaces Pelco's matrix switchers that use Pelco P protocol with Pelco's receivers that use Coaxitron® protocol for command and control functions.

The **CM9760-CXTA** will also interface Pelco's digital video recorders (DVRs) that use Pelco D protocol with Pelco's receivers that use Coaxitron protocol for command and control functions.

CX9000, Legacy®, Spectra®, and Esprit® receivers can be used with the **CM9760-CXTA**.

The 32 BNCs are looped inside the unit. Each BNC on the top row is paired with a BNC on the bottom row. This allows either the top or bottom BNC to be selected as an input or output to communicate to or from the receiver.

The rear of the **CM9760-CXTA** has input and output connectors that allow two translator units to be cascaded. This makes 32 Coaxitron ports available that can be controlled from one RS-422 communication port on a System 9700 Series CC1.


The eight-position DIP switch allows the protocol for the BNC inputs to be set to either 15 bits or 32 bits. The DIP switch is also used to configure Pelco P or Pelco D protocol and data rates.



CM9760-CXTA (FRONT)



CM9760-CXTA (REAR)

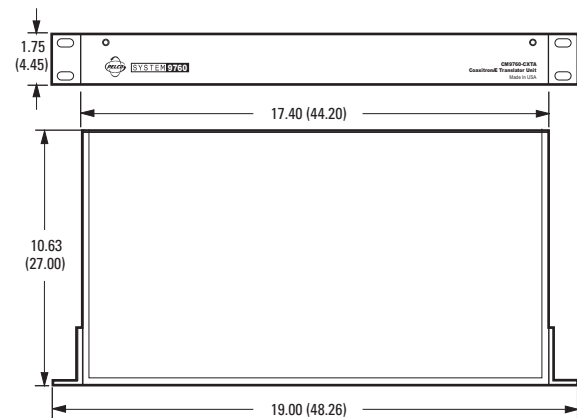

NOTE: VALUES IN PARENTHESES ARE CENTIMETERS;
ALL OTHERS ARE INCHES.



by Schneider Electric

International Standards
Organization Registered Firm;
ISO 9001 Quality System



C539 / REVISED 10-31-10

TECHNICAL SPECIFICATIONS

MODEL

CM9760-CXTA Coaxitron translator

ELECTRICAL

Input Voltage	100 to 240 VAC, 50/60 Hz, auto-ranging
Power Consumption	15 VA
Coaxitron Ports	
Video Format	NTSC or PAL
Video Level	±6 dB minimum
Coaxitron Level	0.7 V peak
Data Ports	
Input	RS-422, 8-way, 4-wire, RJ-45 connector DIP-switch selectable baud rate, even parity
Output	RS-422, 8-way, 4-wire, RJ-45 connector DIP-switch selectable baud rate, even parity
Indicators	Power LED (green)
Fusing	1/4A, 250 VAC

MECHANICAL

Connectors	
Video	BNC type (32 total)
Power	3-wire, 18 AWG
RS-422	RJ-45 (8-way), connectors (2 total)

GENERAL

Dimensions	
Base Only	1.75" H x 17.40" W x 10.63" D (4.45 x 44.20 x 27.00 cm)
With Rack Ears	1.75" H x 19.00" W x 10.63" D (1 RU) (4.45 x 48.26 x 27.00 cm)
Mounting	Fits 19-inch EIA-standard rack
Operating Temperature	32° to 158°F (0° to 70°C)
Unit Weight	5.7 lb (2.59 kg)
Shipping Weight	13 lb (5.91 kg)

CERTIFICATIONS/RATINGS

- CE, Class B
- FCC, Class B
- C-Tick


COMPATIBLE DEVICES

CM9700-CC1
KBD200A (Direct Mode)
KBD300A (Direct Mode)
CM9760-KBD (Direct Mode)
DX4000, DVR5100, DX8100 (Digital Video Recorder)

RECEIVER/DRIVERS "TYPE"



CM9760-KBD (DIRECT MODE) DX8100 (DIGITAL VIDEO RECORDER)

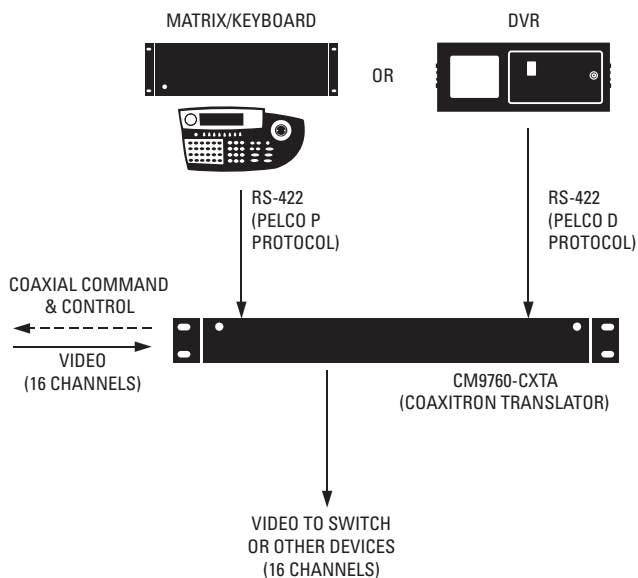

Pelco, Inc. Worldwide Headquarters:

3500 Pelco Way, Clovis, California 93612-5699 USA

USA & Canada Tel: (800) 289-9100 • FAX: (800) 289-9150

International Tel: +1 (559) 292-1981 • FAX: +1 (559) 348-1120

www.pelco.com

Pelco, the Pelco logo, and other trademarks associated with Pelco products referred to in this publication are trademarks of Pelco, Inc. or its affiliates. All other product names and services are the property of their respective companies. Product specifications and availability are subject to change without notice. ©Copyright 2010, Pelco, Inc. All rights reserved.