Rev. DSVR1_B0IK

Overview

Converts a 24VAC or 24VDC input into a regulated 12VDC output.



Specifications

- 1 amp of continuous supply current output.
- Power LED indicator.
- Electronically filtered and regulated output.
- Built-in overload protection.
- Modular connector/cable assembly facilitates ease of wiring.
- High impact insulated housing.

• Compact design allows for integration in a wide range of camera housings.

Dimensions (approximate): 1.625"L x 2.375"W x 1"H

VR1 weights (approximate): Product weight: 0.13 lbs. Shipping weight: 0.15 lbs.


Applications

• Power for 12VDC CCTV cameras and accessories, Fiber Optic Transmitters, REX PIR's, Prox Readers, etc.

24VAC or 24VDC Input 12VDC Camera Heater VR1

CCTV Applications:

Access Control Applications:

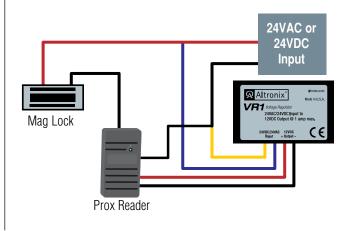

Agency Approvals

