


**Component holder terminal blocks**  
**With neon lamp indicator**  
**Empty blocks**  
**Double deck**  
**Compression clamp**  
 **DIN 1 - 3**




End stop		th. 9,1 mm	<b>BAMH</b>	V2	<b>0114 836.00</b>
End stop		th. 9,1 mm	<b>BAMH VO</b>	VO	<b>0194 836.01</b>
Rail		35 x 7,5 x 1	<b>PR3.Z2</b>		<b>0174 300.17</b>
Rail		35 x 15 x 2,3	<b>PR4</b>		<b>0168 500.12</b>
Rail		35 x 15 x 1,5	<b>PR5</b>		<b>0168 700.22</b>
Rail		32 x 15 x 1,5	<b>PR1.Z2</b>		<b>0163 050.04</b>

Other end stops, rails and accessories : see section on accessories.

**Notes**

The use of some accessories may decrease the block's voltage rating. For more information, consult us.



**Accessories**

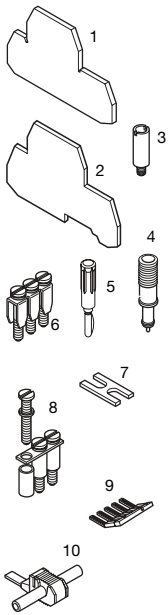

<b>1</b> End section	grey	
<b>2</b> Separator end section	grey	
<b>3</b> Test socket		
<b>4</b> Test device	grey	
<b>5</b> Test plug		
<b>6</b> Assembled jumper bar	32 A	
(without IP 20 protection)	32 A	
Assembled jumper bar	32 A	
(with IP 20 protection)	32 A	
<b>7</b> Connector plate	35 A	
<b>8</b> Jumper bar not assembled	32 A	
Screw + post + washer		
<b>9</b> Comb-type jumper bar	35 A	
<b>10</b> IDC jumper		
<b>R</b> See section on markers marking method		

**M 4/6.DE2**


Spacing 6 mm + 0,05 (.238")



Empty blocks for components (th. 5 mm maxi).  
 Internal, soldered connections, external, by compression clamp.

**M 4/6.DL...**

Spacing 6 mm + 0,05 (.238")



1 connection with 4 inputs on 2 decks. Equipped with a non-protected LED 24 V.

--	--	--	--

Colour	Type	P/N
Upper circuit opened		
Grey	<b>M 4/6.DE2</b>	<b>0115 326.11</b>

Colour	Type	P/N
+ on the upper circuit		
Grey body/red Led	<b>M 4/6.DL</b>	<b>0115 178.25</b>
Grey body/green Led	<b>M 4/6.DLV</b>	<b>0115 522.06</b>
+ on the lower circuit		
Grey body/red Led	<b>M 4/6.DL1</b>	<b>0115 179.26</b>

**Characteristics**

Wire size	NFC		
	DIN	UL	CSA
Compression Solid wire	0,5-4 mm <sup>2</sup>		22-12 AWG
clamp Stranded wire	0,5-4 mm <sup>2</sup>		22-12 AWG
Compression Solid wire			
clamp Stranded wire			

**Characteristics**

Wire size	NFC		
	DIN	UL	CSA
Compression Solid wire	0,2-4 mm <sup>2</sup>	22-12 AWG	22-12 AWG
clamp Stranded wire	0,22-4 mm <sup>2</sup>	22-12 AWG	22-12 AWG
Compression Solid wire			
clamp Stranded wire			

**Voltage**

Rated	500 V Gr.C	300 V
Pulse		
Pollution degree		

**Current**

Rated	26 A	20 A
-------	------	------

**Wire size**

Rated / Gauge	4 mm <sup>2</sup> / A4	12 AWG	
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
8,5 mm	4 mm	0,5-0,6 Nm	IP20
.33"	.16"	4.4-5.3 lb.in	NEMA 1

**Voltage**

Rated	500 V Gr.C	600 V	300 V
Pulse			
Pollution degree			

**Current**

Rated	20 A	20 A	20 A
-------	------	------	------

**Wire size**

Rated / Gauge	4 mm <sup>2</sup> / A4	12 AWG	12 AWG
Wire stripping length	Recomm. screwdriver	Recomm. torque	Protection
8,5 mm	4 mm	0,5-0,6 Nm	IP20
.33"	.16"	4.4-5.3 lb.in	NEMA 1

Type		P/N
FEM6D	th. 1,0 mm	0118 499.23
SCF6D	th. 1,0 mm	0118 495.17
AL2	DIA. 2,0 mm	0163 070.00
AL3	DIA. 3,0 mm	0163 261.00
DCG		0163 218.05
FC2 (2)	DIA. 2,0 mm	0007 865.26
BJM6D (1)(3)	2 poles	0173 515.11
BJM6D (1)(3)	3 poles	0173 516.12
BJM6D (1)(3)	4 poles	0173 517.13
BJM6D (1)(3)	5 poles	0173 519.25
BJM6D (1)(3)	10 poles	0173 520.22
BJMI6D (1)(3)	2 poles	0179 668.20
BJMI6D (1)(3)	3 poles	0179 669.21
BJMI6D (1)(3)	4 poles	0179 670.26
BJMI6D (1)(3)	5 poles	0179 671.13
BJMI6D (1)(3)	10 poles	0179 672.14
EL6 (1)(3)		0173 627.21
BJS61 (1)(3)	10 poles	0168 485.27
EV6D		0168 400.16
PC61	th. 0,5 mm 10 poles	0163 311.22
AD2,5		0114 205.20

Type		P/N
FEM6D	th. 1,0 mm	0118 499.23
SCF6D	th. 1,0 mm	0118 495.17
AL2	DIA. 2,0 mm	0163 070.00
AL3	DIA. 3,0 mm	0163 261.00
DCG		0163 218.05
FC2 (2)	DIA. 2,0 mm	0007 865.26
BJM6D (1)(3)	2 poles	0173 515.11
BJM6D (1)(3)	3 poles	0173 516.12
BJM6D (1)(3)	4 poles	0173 517.13
BJM6D (1)(3)	5 poles	0173 519.25
BJM6D (1)(3)	10 poles	0173 520.22
BJMI6D (1)(3)	2 poles	0179 668.20
BJMI6D (1)(3)	3 poles	0179 669.21
BJMI6D (1)(3)	4 poles	0179 670.26
BJMI6D (1)(3)	5 poles	0179 671.13
BJMI6D (1)(3)	10 poles	0179 672.14
EL6 (1)(3)		0173 627.21
BJS61 (1)(3)	10 poles	0168 485.27
EV6D		0168 400.16
PC61	th. 0,5 mm 10 poles	0163 311.22
AD2,5		0114 205.20

(1) Sides of block (2) Top of block  
 Note : (1) Use of these accessories requires the user to cut out the partition.  
 (2) For block equipped with AL2 or DCG.  
 (3) These accessories can be mounted on the lower deck only.