


THIS DRAWING HAS BEEN GENERATED
AND IS MAINTAINED BY A CAD SYSTEM.
CHANGES SHALL ONLY BE
INCORPORATED AS DIRECTED BY THE
DESIGN ACTIVITY.

REVISIONS

LTR	DESCRIPTION	ECO NUM.	DATE	APPROVED
01	Concept release		11/06/01	
02	Pre-production release		11/20/01	DWR

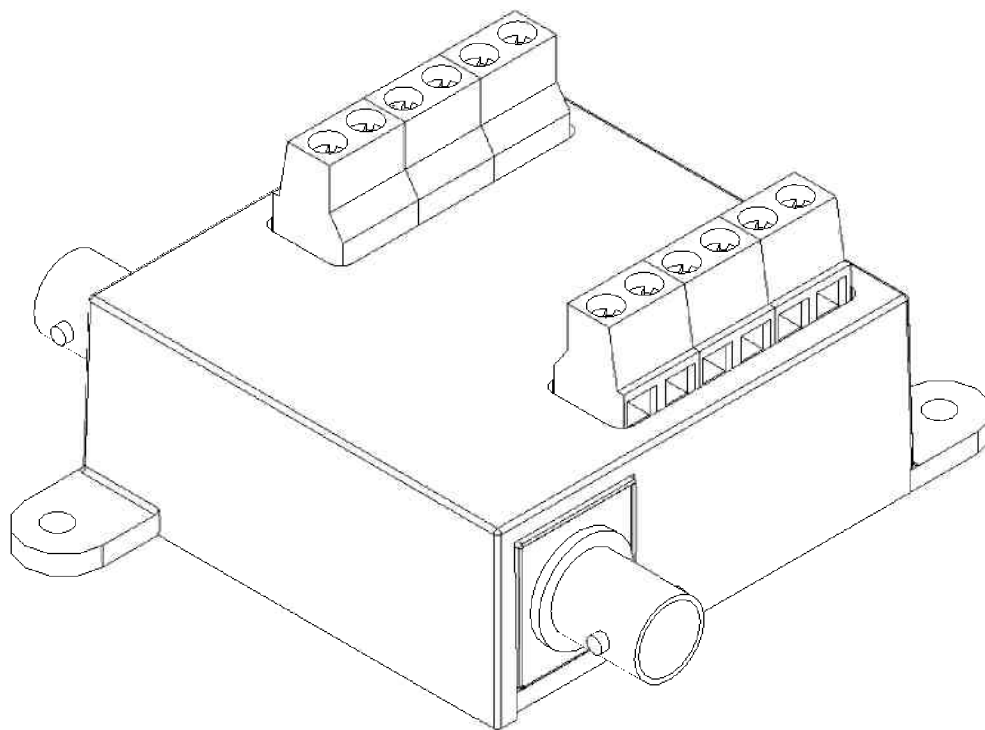

UNLESS
OTHERWISE
SPECIFIED DIM.
IN INCHES
BEFORE
PLATING

DRAWN:

JDW

DATE

11/6/01

CHECKED:

CKW

1/7/02

ENGR. APPD:

MLH

1/8/02

PROJ. APPD:

DWR

1/4/02

APPROVED:

TRANSTECTOR®

SUPERIOR SURGE SUPPRESSION

TITLE:

**CCTV-PTZ
SPECIFICATION**

MATERIAL:

NOTED

NOTICE: THE INFORMATION
AND DESIGN CONTAINED HEREIN IS
THE PROPERTY OF TRANSTECTOR
SYSTEMS. WHO RESERVES ALL
RIGHTS THERETO

SIZE

A

CAGE

30992

DRAWING NUMBER

1400-411

REV

02

SCALE = **▲**A

PAGE 1 OF 3

SURGE SUPPRESSOR Model: CCTV-PTZ

1. **GENERAL DESCRIPTION:** The CCTV-PTZ surge suppressor is a high-speed, high-current solid state device designed to protect Closed Circuit Television Cameras. **The CCTV-PTZ uses only silicon avalanche suppression diodes (SASD).** It connects to the service in a pass through configuration. The CCTV-PTZ provides protection for the camera's RF signal via pass-through BNC connectors. The CCTV-PTZ provides protection for both 24 Volt AC and DC and 2-wire RS 232 signal (for pan-tilt-zoom control) via pass-through terminal blocks. The molded plastic enclosure features integrated mounting holes to mount the unit using #4 hardware. The CCTV-PTZ is approved to UL 497 B.

2. PERFORMANCE REQUIREMENTS:

2.1. Electrical Service:

2.1.1.COAX

- 2.1.1.1. Attenuation..... -3 db @ 90 MHz
- 2.1.1.2. Configuration Coax
- 2.1.1.3. Input Connection..... BNC
- 2.1.1.4. Protection Modes Tip to Ring, Ring to Ground
- 2.1.1.5. MCOV 12 V Tip to Ring, 40V Ring to Ground

2.1.2.24 V

- 2.1.2.1. Service Voltage 24 V AC/DC
- 2.1.2.2. Configuration 2 wire + Ground
- 2.1.2.3. Input Connection..... Screw-Term. Block (22-16 AWG)
 - 2.1.2.3.1. Number of connector positions 6 (3 in, 3 out)
- 2.1.2.4. Protection Modes Line to Line, Line to Ground
- 2.1.2.5. Maximum Continuous Operating Voltage 40 VDC / 28 VAC

2.1.3.RS232, RS422, RS485

- 2.1.3.1. Configuration 2 wire + Ground
- 2.1.3.2. Input Connection..... Screw-Term. Block (22-16 AWG)
 - 2.1.3.2.1. Number of connector positions 6 (3 in, 3 out)
- 2.1.3.3. Protection Modes Line to Line, Line to Ground
- 2.1.3.4. Maximum Continuous Operating Voltage 24 VDC

2.2. Electrical Performance:

2.2.1.COAX

2.2.1.1. Testing:

- 2.2.1.1.1. Tested to IEEE 10/1000 Long Wave
 - 2.2.1.1.1.1. Ipk 140 A peak
- 2.2.1.2. Response Time (Max) 5 nanoseconds
- 2.2.1.3. Standby Power (Max) < 0.5 Watt
- 2.2.1.4. Operating Temperature..... -40°C to +65°C
- 2.2.1.5. Joules 13

2.2.2.24 V

2.2.2.1. Testing:

- 2.2.2.1.1. Tested to IEEE 10/1000 Long Wave
 - 2.2.2.1.1.1. Ipk 150 A peak
- 2.2.2.2. Response Time (Max) 5 nanoseconds
- 2.2.2.3. Standby Power (Max) < 0.5 Watt
- 2.2.2.4. Operating Temperature..... -40°C to +65°C
- 2.2.2.5. Joules 10

2.2.3. RS232, RS422, RS485

2.2.3.1. Testing:

2.2.3.1.1. Tested to IEEE 10/1000 Long Wave

2.2.3.1.1.1. I_{pk} 190 A peak

2.2.3.2. Response Time (Max) 5 nanoseconds


2.2.3.3. Standby Power (Max) < 0.5 Watt

2.2.3.4. Operating Temperature -40°C to +65°C

2.2.3.5. Joules 10

2.3. Mechanical:

2.3.1. Enclosure Description: The suppressor is housed in a molded plastic enclosure that is rated to UL 94 V0.

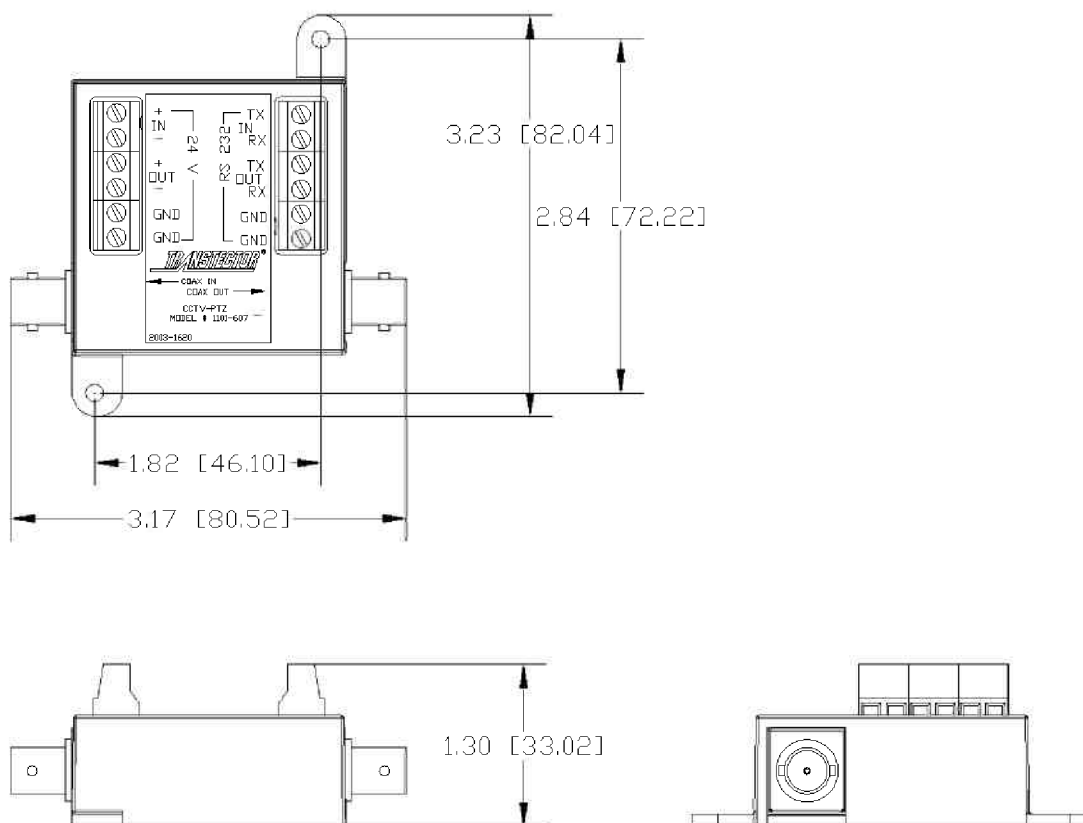

3. ENVIRONMENTAL:

3.1. Operating Temperature: -40°C to +80°C

3.2. Storage Temperature: -40°C to +80°C

3.3. Relative Humidity: 90%