

Professional Quality Call Recording Solution for Home or Business

The Algo 4105 Analog AuxBox is a state-of-the-art digital call recording solution for home or small business analog phones. Ideal for capturing and managing comprehensive call information, the 4105 combines the power of a PC interface with advanced digital audio recording capability. Record automatically or on demand for easy playback, archiving, and emailing.

Plug-and-Play Setup

- Connects to USB port and analog telephone jack
- Easy-to-install Windows-based Software

Detailed data capture

- Conversations recorded in high-quality WMA digital audio files
- Logs call display data, call duration, missed calls, & user-entered comment field per call record
- Captures data from multiple phones and extensions on the same line - including cordless and hands-free phones
- All call records time and date stamped

Fast Call Record Retrieval, Sharing, and Reporting

- Find call records instantly through Sort, Search, and Advanced Query functions (by date, call duration, comment, or call type fields)
- One-click E-mail function permits easy sharing of call records
- Display statistical summary of telephone activity
- Export call record files to Excel



Flexibility

- Automatic recording mode records all calls continuously
- Manual recording mode records calls on-demand (last unrecorded call is always retained in memory for optional "post-save")

Typical Applications

- Transaction Evidence and Verification
- Purchasers, Traders, Sales Professionals
- Legal, Accounting, Medical, Financial Offices
- Schools
- Conference Calls
- Telephone Order Lines
- Call Centers, Customer Service, Dispatch
- Security
- Training for Self-Improvement
- Quality Monitoring

Ordering Information

Description	Product Code
Analog AuxBox Call Recorder (includes Client Call Recorder Software CD, USB cable, telephone cord, and Installation Guide)	4105

Specifications

Power	USB Powered Device (<100 mA)
Recording	Records digitally to PC hard drive; 3 MBytes per hour (Client Call Recorder Software default WMA encoding)
PC Requirements	Windows 2000, ME, XP, Vista; P3 450 MHz or better; available USB port; 100 MB Hard Drive space; 256 MB RAM; Sound Card, CD-ROM
Caller ID (CLID) Support	Telcordia GR-30-CORE and BT SIN 242
Message Waiting	Lamp Pulse, Stentor ID-008 and BT SIN 242
Auxiliary Output	Activated by ring, message waiting, and in-use (off-hook)
Longitudinal Balance	60 dB minimum
Input Impedance	>1 MOhm
Regulatory	FCC, CSA (US and Canada), CE, Industry Canada
USB	1.1
Cables provided	One 6 ft (1.8 m) USB cable One 6 ft (1.8 m) 2.5mm-to-2.5mm relay cord One 7 ft (2.1 m) 6-conductor telephone line cord
Dimensions	Width - 5.75" (14.5 cm) Depth - 6.75" (17.5 cm) Height - 1.5" (4.25 cm)


4105 Front Panel View



4105 Back Panel View



Typical Connection Diagram

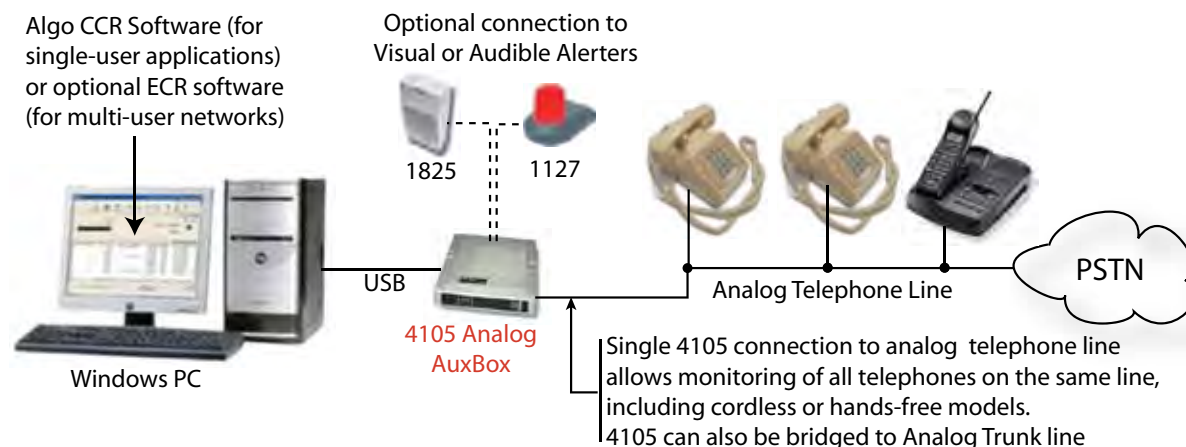

DC4105BR-11 November 2009 © Algo Communication Products Ltd. All rights reserved. Algo® is a registered trademark of Algo Communication Products Ltd. All other trademarks are the property of their respective owners.

www.algosolutions.com

Algo Communication Products Ltd., 4500 Beedie Street, Burnaby, BC Canada V5J 5L2

Sales & Support: 1-877-884-2546 (USA & Canada) or +1-604-454-3790; sales@algosolutions.com; support@algosolutions.com