

# MNTZ36R Corner Mount Bracket User's Manual

❑ **Compatible with Digimerge Camera Models:** DPZ36W023 / DPZ36W030

❑ **Required Accessory:** MNTZ36W

## ❑ Usage Cautions and Warnings

Please read through the User Manual and all safety instructions prior to use.

- All the safety and operating instructions should be read before installing. Follow all operating instructions.
- Installation must be performed by a trained professional.
- Do not use the product with cameras other than the recommended models.
- The mounting has to be installed onto a firm and stable location that can support the weight of the camera and mount. Ensure all parts are completely secured.
- Do not use the product for other purposes.

## Product Characteristics


This product has been designed to be used in the installation of speed dome cameras. This product has been fabricated using strong, corrosion-free aluminum alloy material.

## Prior To Installation


Avoid installing the mounting onto an unstable structure such as a gypsum wall panel. Install the mounting onto a strong structure such as a concrete wall, steel beam, etc. Use concrete screws with plugs or other installation tools when installing the mount onto a concrete structure. Make sure that all the screw parts are metallic.

Avoid screwing too close to the edge of a piece of wood when screwing into a wooden structure.

## Installation

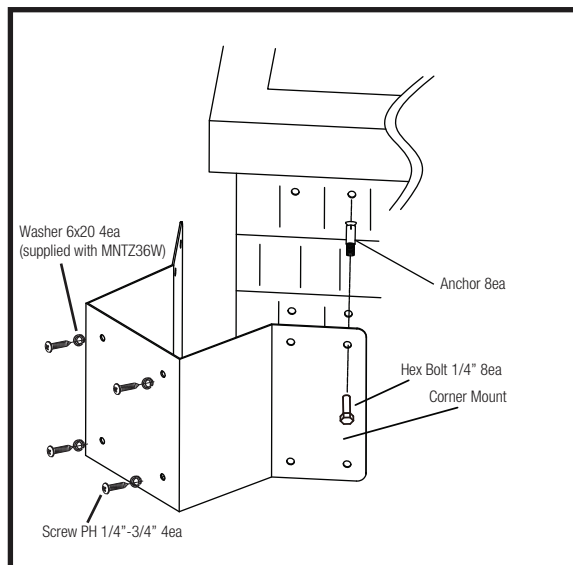


- ① Drill 8 anchor bolt holes in the wall according to the hole pattern in the corner mount.
- ② Insert the anchors (8ea). Set the corner mount on the anchors and use the 1/4" hex bolts (8ea) to fasten the bolts.
- ③ Attach MNTZ36W to corner mount using the PH 1/4" - 3/4" screws (4ea) with the 6x20 washers (4ea) supplied with MNTZ36W. Refer to MNTZ36W instructions for details.

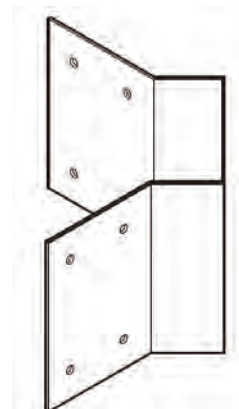

## Description

- Steel body
- Unit : 1.3Kg

## Dimensions

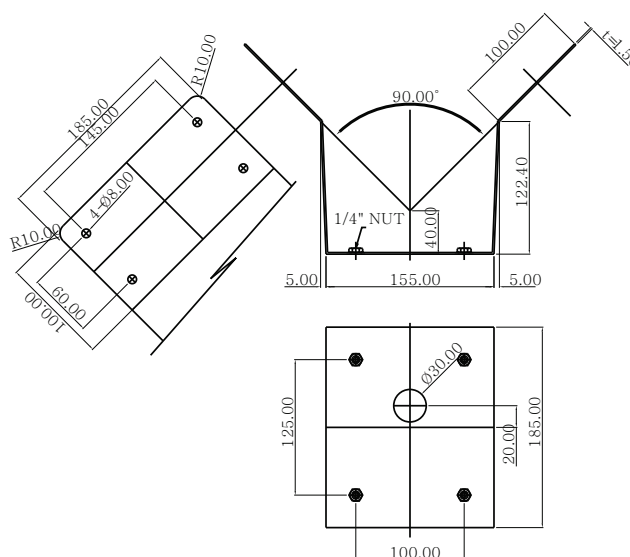

## Accessories

No	Part Name	Q'ty
1	SCREW PH 1/4" - 3/4" (SUS)	4
2	ANCHOR 1/4" (SUS)	8
3	HEX BOLT 1/4"	8