

Serial Device Servers - 8 port

100 series: RS-232 to Ethernet (LAN) 400 series: RS-232/422-485 to Ethernet (LAN)



PRODUCT FEATURES

- Built-in web server for convenient browser-based configuration and support
- Fast serial baud rates up 921 kbps and auto-negotiating 10/100 Ethernet speed
- Serial tunneling, IP multicast, virtual COM port modes for flexibility and easy integration
- SNMP support for simple network management
- Surge suppression and +5V Out options

Industry-leading, Device Networking Performance

When you need the ultimate in performance, ease of use and reliability, Quatech[™] Serial Device Servers provide the highest throughput and lowest latency available. With budget-friendly prices, you won't find a better priceto-performance ratio!

Overcome Serial Limitations By Network Enabling Devices

Serial devices are used in virtually all industries and are proven to be reliable and robust. But there are drawbacks – cable lengths are limited and costly, COM ports are often in short supply, and attached serial devices are not remotely accessible for monitoring and support. A Quatech[™] Device Server overcomes all these limitations. Hardware and drivers are invisible to connected serial devices and their software applications, routing data through an IP network to "virtual" COM ports installed on the host PC.

Installation Wizard Makes It Easy To Get Started

An intuitive Installation Wizard gets you up and running quickly, automatically searching local and remote subnets for installed device servers in seconds. Network settings automatically assigned by DHCP networks are displayed for confirmation. Or enter a static IP address – no bother with telnet sessions, MAC address data entry or special cables. Quatech[™] device servers may be managed through the Windows[®] Device Manager interface or a Web browser, so you can count on troublefree configuration and maintenance long after the initial installation is completed. Models use the same drivers, manuals and installation wizard to simplify deployment and use.

ORDERING INFORMATION

MODEL NUMBER	NUMBER OF PORTS	INTERFACE	CONNECTOR
ESE-100D	8	RS-232	DB9 male
ESE-400D	8	RS-232/422-485 (MEI)	DB9 male

-400 models: Supports RS-232, RS-422/485 on all serial ports.

-Includes: CD with custom datagram utility with command line interface.

ACCESSORIES

 $\mbox{PS-SDS}$ - Replacement Wall transformer $\ 120\mbox{VAC/DC}$ Power Supply, 5VDC @ 3W, 2.1 MM plug (NA Kit)

DS-RACK-BLK - Rack Mount Kit for ESE models-Black

Serial Device Servers 8 port



oit

100 series: RS-232 to Ethernet (LAN) 400 series: RS-232/422-485 to Ethernet (LAN)


SPECIFICATIONS

SPLOIFICATI				
SERIAL TECHNOLOGY		NETWORK COMMUNIC	CATIONS	
RS-232	DCD, RxD, TxD, DTR, GND, DSR, RTS, CTS, RI	LAN	10/100 Base T	
RS-485 2-Wire	Data +, Data -, GND	NETWORK PHYSICAL	NETWORK PHYSICAL LAYER STANDARDS	
RS-422/485 4-Wire	AuxIn-, RxD+, TxD+, AuxOut-, GND, RxD-, AuxOut+, AuxIn+, TxD-	Ethernet	IEEE 802.3 auto-negotiating, auto MDI/MDIX	
Serial Connector	DB9M or RJ45	PROTOCOLS		
Data Rate	Up to 921.6k bps	Protocols	UDP, TCP/IP, HTTP, DHCP, ARP, ICMP, SNMP (MIB II)	
POWER		IP Mode	DHCP, static IP, custom UDP	
Source	Power supply included	TCP/UDP UDP	User definable Unicast, Multicast	
Input Voltage	5 VDC	OTHER		
Connector	Barrel	Connection Mode	Normal, Tunneling, Raw TCP, Auto TCP, Raw UDP	
Power Consumption	4W (typical)	Client Connection	Supported	
MECHANICAL		Diagnostics	Port Status, Ping Test	
LED Indicators	Power, Link, Speed, Data, Status	Firmware Upgrade	Via web interface	
Switches	Reset button	CONFIGURATION SOFTWARE		
Dimensions	25.35 x 13.72 x 4.97 cm (9.98 x 5.40 x 1.96 in)	OS Compatibility	Windows supported up to and including 32-bit/64-bit Win7 (WHQL signed), Linux (four 2.6.27 kernel)	
Enclosure	Metal	REGULATORY / CERTI		
ENVIRONMENTAL		Compliance	FCC, CE, IC	
Operating Temperature	0 to +70°C (-40 to +70°C, storage)	oompilalie		
Operating Humidity	10% to 90% non-condensing	_		
NETWORK				
SDRAM	8 MB			

MECHANICAL DIAGRAM

2 MB

FLASH Memory

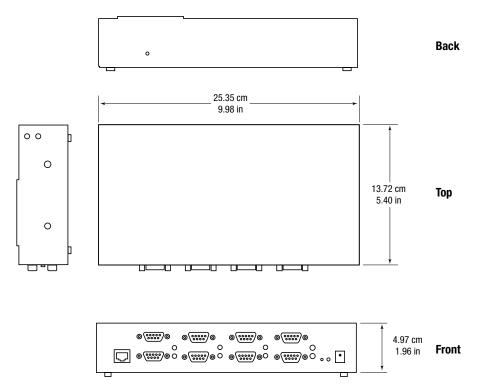

orders@bb-elec.com support@bb-elec.com