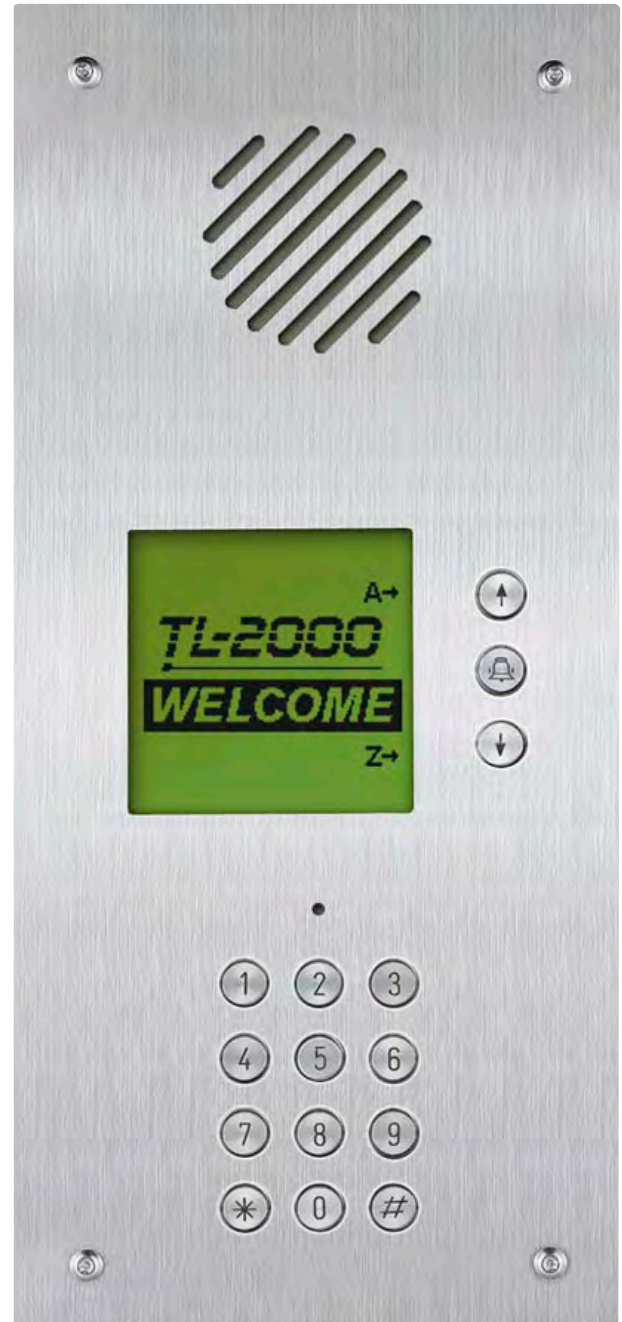


DESCRIPTION:

The TL-2000 is a stainless steel flush mount entry panel that can be programmed to call up to 2,000 different tenants/residents using their existing telephone numbers. The tenants will be able to answer a call from their visitor and unlock the entry door by entering a code on their phone. Up to 2,000 unique access codes can also be programmed into the system for tenant entry. A maximum of 5 entry panels can share the same telephone line. The TL-2000 is programmed using a PC with the supplied software. It can be programmed on-site using the supplied RS232 cable or off-site using a modem.

**FEATURES:**

- Contact tenants using a phone line
- Up to five TL-2000 panels per phone line
- Up to 2,000 main telephone numbers/tenants and 2,000 secondary numbers can be used
- Door release
- Program up to 2,000 unique access codes
- RS-232 connection for programming
- PC software included to program and update device
- Connect to device directly on site or via a modem off-site

TL-2000

Multi-Tenant Telephone Entry System

FEATURE CALL-OUT DEFINITIONS:

- [1] Speaker
- [2] Display
- [3] Scroll Up
- [4] Call Button
- [5] Scroll Down
- [6] Microphone
- [7] Keypad
- [8] Security Screws

SPECIFICATIONS:

- Power Source: 12V DC (PS-1225UL)
- Current Consumption: 450mA
- Communication: Standard analog DTMF
- Door release: 2A @ 12V DC, 1A @ 24V DC
- Material: Stainless steel
- Programming: PC w/ Windows XP, Windows Vista, or Windows 7 Operating systems
- Entry code: 3-8 digits
- Wire: Standard category phone wire
- Operating Temp: 5°F to 140°F
- Dimensions: 6-1/16" W x 13-3/8" H x 2-1/2" D

FEATURE CALL-OUTS:

