


dual independent am video receiver
with automatic gain control (agc)



Description

The ComNet™ FVR22 dual video receiver detects two independent AM video signals in one module on two independent multimode fiber optic cables. The module is not a multiplexer. The module is ideal for smaller CCTV installations and the rack mount version can be used to double the fixed video capacity of the C1 rack for up to 28 independent video channels per card cage. The modules utilize Automatic Gain Control (AGC). The receiver is compatible with the ComNet FVT11M and the FVT20 dual video transmitter. Plug-and-play design ensures ease of installation. Bi-color (Red/Green) LED indicators are provided for rapidly ascertaining equipment operating status. Packaged in the exclusive ComNet ComFit housing, these units may be either wall or rack-mounted, or may be DIN-rail mounted by the addition of ComNet model DINBKT1 adaptor plate.

Features

- AM Video Receiver
- NTSC, PAL, SECAM compatible
- Full range Automatic Gain Control (AGC)
- Two independent receivers in one model
- Full color compatibility
- Can be used to double the fixed video capacity of a C1 card cage
- Plug-and-Play design for ease of installation
- No in-field electrical or optical adjustments required
- Voltage transient protection on all power and signal input/output lines provides unconditional protection from power surges and other voltage transient events.
- Bi-Color (Red/Green) indicating LED to monitor system performance
- Hot-swappable rack modules
- Interchangeable between stand-alone or rack mount use
 - ComFit
- Automatic resettable fuses on all power lines
- Lifetime Warranty

Applications

- CCTV (Fixed Video)



dual independent am video receiver with automatic gain control (agc)

FVR22

specifications

VIDEO

Video Output:	1 volt pk-pk (75 ohms)
Bandwidth:	5 Hz - 10 MHz
Differential Gain:	<5%
Differential Phase:	<5°
Tilt:	<1%
Signal-to-Noise Ratio (SNR):	60 dB typical 54 dB minimum
Max. RG-59 COAX Distance:	100m (300ft) Camera to Fiber Optic Module to maintain 6Mhz Bandwidth

WAVELENGTH

FVR22	850 nm, Multimode
-------	-------------------

NUMBER OF FIBERS

2

CONNECTORS

Optical:	ST
Power:	Terminal Block
Video:	BNC (Gold Plated Center-Pin)

LED INDICATORS

- Video Presence for Each Channel

ELECTRICAL & MECHANICAL

Power:	8-15 VDC @ 120 mA
Surface Mount:	From Rack
Rack:	1
Number of Rack Slots:	Automatic Resettable Solid-State Current Limiters Meets IPC Standard
Current Protection:	6.1 × 5.3 × 1.1 in., (15.5 × 13.5 × 2.8 cm)
Circuit Board:	<2 lb./0.9 kg
Size (in./cm) (L×W×H)	
Surface Mount:	
Shipping Weight:	

ENVIRONMENTAL

MTBF:	>100,000 hours
Operating Temp:	-40° C to +75° C
Storage Temp:	-40° C to +85° C
Relative Humidity:	0% to 95% (non-condensing)*


* May be extended to condensation conditions by adding suffix '/C' to model number for conformal coating.



PART NUMBER	DESCRIPTION	FIBERS REQUIRED	FIBER	OPTICAL PWR BUDGET	MAX. DISTANCE†
FVR22	AGC Dual Video Receiver (850 nm)	2	Multimode 62.5/125µm	14 dB	4 km (2.5 miles)
Accessories	9 Volt DC Plug-in Power Supply, 90-264 VAC, 50/60 Hz (Included)				
Options	Add '/C' for Conformally Coated Circuit Boards (Extra charge, consult factory) DIN-Rail Mounting Adaptor Plate Kit – With mounting hardware (Optional, order model DINBKT1)				

† Distance may be limited by optical dispersion.

Complies with FDA Performance Standard for Laser Products, Title 21, Code of Federal Regulations, Subchapter J
In a continuing effort to improve and advance technology, product specifications are subject to change without notice.

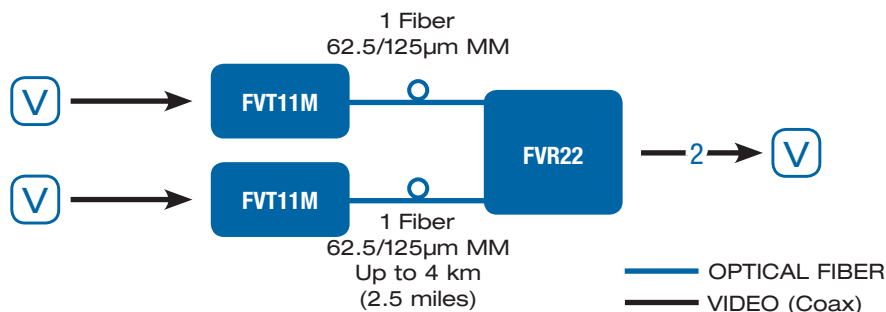

comnet
Communication Networks

3 CORPORATE DRIVE | DANBURY, CT 06810 | USA
T: 203.796.5300 | F: 203.796.5303 | TECH SUPPORT: 1.888.678.9427 | INFO@COMNET.NET
8 TURNBERRY PARK ROAD | GILDERSOME | MORLEY | LEEDS, UK LS27 7LE
T: +44 (0)113 307 6400 | F: +44 (0)113 253 7462 | INFO-EUROPE@COMNET.NET