

Six Feet Super-Low Loss Coaxial Antenna Cable


Features


- 6 feet length
- 0.600 inch diameter
- One Standard N-Type Connector
- One Right-Angle N-Type Connector



Technical Specifications			
ELECTRICAL		MECHANICAL	
FREQUENCY RANGE	0 – 6 GHz	CONNECTORS	1 x N-Male
VSWR	1.5:1 max		1 x RA N-Male
INSERSION LOSS	0.7 dB max @ 0 - 3 GHz	TOTAL WEIGHT	< 0.44 lbs (< 200 g)
	1.1 dB max @ 3 - 6 GHz	TOTAL LENGTH	6 feet 2 inch (1 m 880 mm)
IMPEDANCE	50 Ohm	CABLE LENGTH	6 feet (1 m 820 mm)
ENVIRONMEMTAL		CABLE DIAMETER	0.600 inch (15 mm)
OPERATING TEMPERATURE RANGE	-40° C to +85° C	RA CONNECTOR HEIGHT	1.420 inch (36 mm)

Six Feet Cable Graph (without connectors)

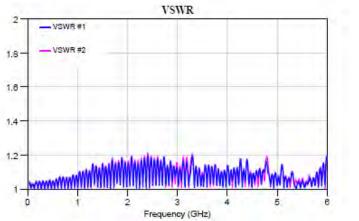

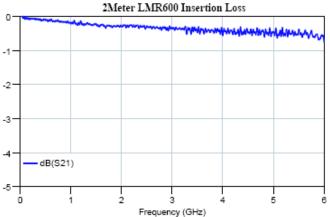

©2013 Proxim Wireless Corporation. All rights reserved. Proxim is a registered trademark and the Proxim logo and Tsunami® are trademarks of Proxim Wireless Corporation. All other trademarks mentioned herein are property of their respective owners. Specifications are subject to change without notice.



DS_0713_CBL-600-6-RA_US