

DS9360 Panoramic TriTech Detector

www.boschsecurity.com



BOSCH

Invented for life



- ▶ Motion Analyzer II processing
- ▶ Microwave adaptive processing
- ▶ Self-test supervision systems
- ▶ Changeable mirrors (two mirrors provided)
- ▶ 360° x 18 m (60 ft) diameter pattern

The ceiling mount panoramic DS9360 TriTech® PIR/Microwave Detector uses several patented processing techniques to provide excellent catch performance with freedom from false alarm. Supervised microwave and PIR sections ensure that the detector is working properly. Field replaceable mirrored optics allows it to be mounted on ceilings from 2.5 m to 6 m (8 ft to 18 ft) in height.

Functions

Signal Processing

Uses passive infrared and microwave technologies to provide an alarm condition when both fields of protection are simultaneously activated. Alarm signals must meet the signaling requirements of both technologies to activate an alarm. Adjustable PIR and microwave sensitivity.

PIR Signal Processing

Motion Analyzer II uses multiple thresholds and timing windows to analyze timing, amplitude, duration and polarity of signals to make an alarm decision. Will not alarm on extreme levels of thermal and illumination disturbances caused by heaters and air conditioners, hot and cold drafts, sunlight, lightning, and moving headlights. Two sensitivity settings are provided.

Microwave Signal Processing

Adaptive processing adjusts to background disturbances. This helps to reduce false alarms while maintaining catch performance.

Test Features

Two high output tri-color alarm LEDs visible from any angle, and flash to indicate a trouble condition.

Certifications and approvals


This detector has been designed to also comply with the requirements of:

Europe Complies with EN50131-1, Grade 2

Region	Certification	
Australia	RCM	
Europe	CE	2004/108/EC: EMC Directive and 2006/95/EC: Low-Voltage Directive; 1999/5/EC Radio equipment and Telecommunications Terminal Equipment (R&TTE); 2011/65/EU Restriction of the use of certain hazardous substances in electrical and electronic equipment [DS9360]
	EN50131	EN50131-2-4, Grade 2


Region	Certification	
USA	UL	ANSR: Intrusion Detection Units (UL639)
	FCC	ESV9360
France	AFNOR	2820200006A0
Brazil	ANATEL	0868-03-1855
Singapore	iDA	LPREQ-S0153-2004

Installation/configuration notes

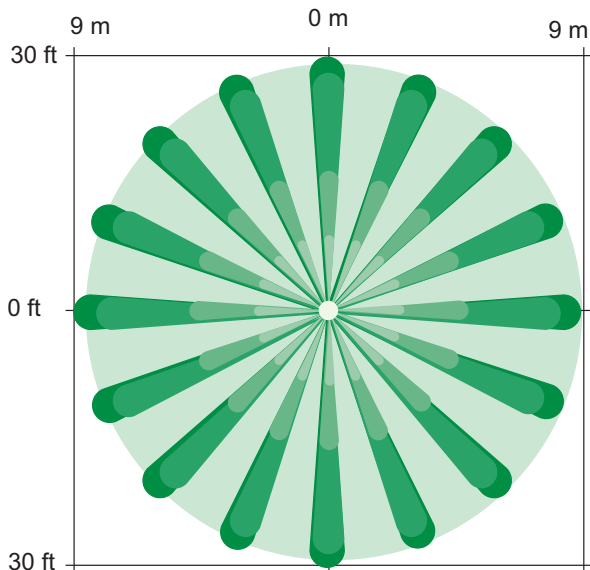

Top View

One of each type of mirror is shipped with the product.
360° x 18 m (60 ft) diameter

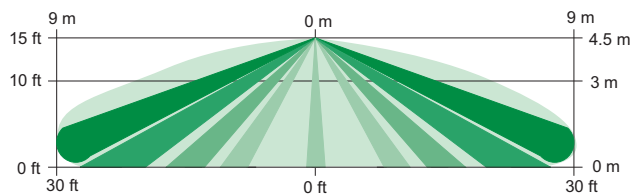

AR13-18 Side View

One of each type of mirror is shipped with the product.
360° x 18 m (60 ft) diameter

Technical specifications

Enclosure Design

Design:	Modular high impact ABS electronic head and mounting/wiring base design with rugged polyethylene dome provides easy access to field setup switches.
Dimensions:	8.5 cm x 13.3 cm (3.5 in. x 5.25 in.)
Material:	High impact ABS plastic enclosure

Environmental Considerations

Operating Temperature:	-40°C to +49°C (-40°F to +120°F) <i>For UL Certificated installations, 0°C to +49°C (+32°F to +120°F)</i>
Radio Frequency Interference (RFI) Immunity:	No alarm or setup on critical frequencies in the range from 26 MHz to 950 MHz at 50 V/m.

Complies with Environmental Class II (EN50130-5)

Mounting

Height Range:	2.5 m to 6 m (8 ft to 18 ft) recommended
Location:	Mounts directly to ceiling or to standard 10.2 cm (4 in.) octagonal electrical box.

Outputs

Alarm:	Form C reed relay rated at 3.0 W, 125 mA at 28 VDC for resistive loads.
Tamper:	Normally-closed (with cover in place) tamper switch. Contacts rated at 28 VDC, 125 mA maximum.

Power Requirements

Current:	18 mA standby; 75 mA in alarm
Voltage:	6 VDC to 15 VDC

Trademarks

TriTech® is a registered trademark of Bosch Security Systems, Inc. in the United States.

Ordering information

DS9360 Panoramic TriTech Detector

Provides PIR and microwave, 360° x 18 m (60 ft) diameter coverage, and 2.5 m to 6 m (8 ft to 18 ft) mounting height.
Order number **DS9360**

Accessories

AR13-18-3 Optical Module

Designed for 4 m (13 ft) to 6 m (18 ft) mounting height. Shipped in packages of three.
Order number **AR13-18-3**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com