

HOB-531-D2 SPECIFICATIONS

HANDSFREE SPEAKERPHONE WITH PUSH BUTTON AUTODIAL IN OPEN ENCLOSURE STEEL HOUSING


Standard Analog Power, but also available in VoIP versions

Weather and vandal resistant stainless steel handsfree speakerphone in an open enclosure wall mount black housing with telephone symbol on sides. Designed to automatically dial a preprogrammed number from 1-11 digits when the button is pushed. If there is no answer when first number is dialed, phone will reset itself and dial a second preprogrammed number and red/green LED light provides visual indication of call progress. Capable of dialing a PBX or access number, block or allow incoming calls, and provides call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with a weatherproof, puncture resistant speaker and microphone, industrial quality pushbutton, and tamper resistant security screws. ADA Emergency features Available. Weather resistant open enclosure housing available in black, (-R) red, or (-S) stainless steel.



SPECIFICATIONS

| | |
|-----------------------------------|---|
| Panel Size: | 7 1/6"W x 11 1/4"H |
| Open Enclosure Housing: | 7 1/4"W x 11 1/2"H x 5"D |
| Weight: | Approximately 10 lbs. |
| Mounting Instructions: | Open Enclosure Housing 4 holes spaced 8" x 5 7/8" |
| Environment: | Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating |
| Programming: | Via DTMF Keypad |
| Input Power: | Telephone Line Powered |
| Loop Current: | 30mA min to 80mA max |
| Impedance: | 600 ohms |
| Type Jack: | RJ11C |
| Ringer Equivalency: | 0.4A |
| UL & FCC Registration: | Certified |
| ACCESSORIES: | 301-064 Security Tool (required for installation) |

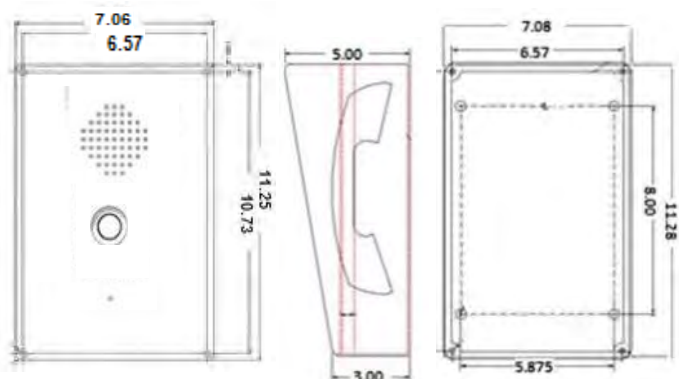

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

| -ADA | Open Enclosure Housing | -RIS | -RIL | Additional Options & Features |
|---|--|---|--|---|
| | | | | Auto Answer (AA) Voice Active (VA) Auto Answer (AA) |
| <ul style="list-style-type: none"> Red/ green LED call progress indicator light Braille Emergency Plate "EMERG. PHONE" Red push button | Standard Black Housing -R Red Housing -S Stainless Steel Housing | Ring Indicator Flashing Blue Light (Requires AC Power) | Ring Indicator Light located on the phone panel for visual ring indication | |



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL

Voice 863-357-0798
Fax 863-357-0006