



by **Schneider** Electric

# Switched Rack PDU

## Overview


The American Power Conversion® Switched Rack PDU distributes power to devices in the rack. It has a sensor that measures the current used by the PDU and its attached devices. The PDU can be monitored through Web, Telnet, SNMP, SSH, or InfraStruXure™ Central interfaces.

**Outlets.** The Rack PDU has twenty-four (24) NEMA 5-20 outlets.

**Display interface.** The interface uses a digital display that shows aggregate current being used by the PDU.

**Power cord.** The 10-foot (3.05-meter) power cord terminates with a NEMA L5-30 connector.

## AP7932

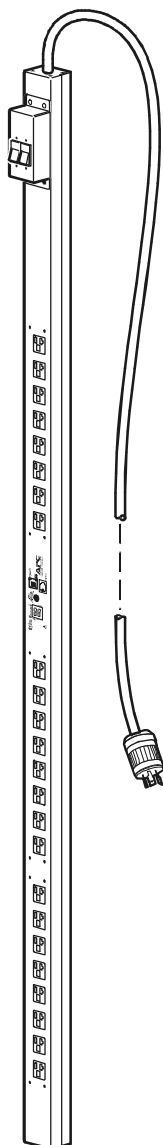



# Specifications

## Electrical

Input connector	NEMA L5-30 plug
Output connectors	(24) NEMA 5-20 outlets
Nominal input voltage	120 VAC
Acceptable input voltage	$\pm 10\%$ of nominal voltage
Input frequency	50/60 Hz

## Physical

Dimensions (H $\times$ W $\times$ D)	70.00 x 2.19 x 1.73 in (177.8 x 5.56 x 4.39 cm)
Shipping dimensions (H $\times$ W $\times$ D)	84.00 x 6.00 x 5.00 in (213.36 x 15.24 x 12.7 cm)
Weight	16.25 lb (7.37 kg)
Shipping weight	18.25 lb (8.28 kg)

## Environmental

Elevation (above MSL)	
Operating	15,000 ft (4500 m)
Storage	50,000 ft (15 000 m)
Temperature	
Operating	23 to 115° F (–5 to 45° C)
Storage	–13 to 149° F (–25 to 65° C)
Humidity	
Operating	5 – 11/200895% RH Non-condensing
Storage	5 – 95% RH Non-condensing

## Compliance

EMC verification	FCC Part 15 Class A ICES-003 Class A
Safety verification	UL/cUL 60950 Listed

Customer support and warranty information is available at the APC Web site, [www.apc.com](http://www.apc.com).

© 2008 American Power Conversion. All rights reserved. All APC trademarks are property of American Power Conversion. Other trademarks are property of their respective owners.



990-1899A  
11/2008

