ATTENUATORS



QC101M/RP Series

RACK PANEL

QC101M/RM Attenuator(s) on 2RU Panel, **4-Pin Terminal Block Connection**

GENERAL DESCRIPTION

The QC101M/RP Series is a 19" 2RU, fully assembled rack panel consisting of one (1) to six (6) continuous rotary, ten-step, 100W, audio level attenuators with OFF position. Connection is a 4-pin terminal block. A ten position index label is mounted on the rack panel. A label holder with clear plastic insert is also mounted below each attenuator. Black powder coat finish. Knob is black with white indicator mark.



QC101M/RP6 Shown

INTENDED USE - Indoor Environment

Primary Use

Each device attenuates audio power to any number of loudspeakers up to 100W. For zone control use with 25V or 70V distributed audio systems. Each step is -1.5dB for precise control of sound masking systems.

MODELS AVAILABLE

QC101M/RP1	One (1) Attenuator on Panel
QC101M/RP2	Two (2) Attenuators on Panel
QC101M/RP3	Three (3) Attenuators on Pane
QC101M/RP4	Four (4) Attenuators on Panel
QC101M/RP5	Five (5) Attenuators on Panel
QC101M/RP6	Six (6) Attenuators on Panel

AUDIO SPECIFICATIONS, each attenuator

Power Rating Attenuation (Ref: 25V, 70.7V Line)

100W Continuous Position 10: Full Signal Position 9-1: -1.5dB each

Insertion Loss < 0.5 dB

Position 0: No Signal

MECHANICAL SPECIFICATIONS


Audio Connection | 4-pin terminal block

OPTIONAL QUAM ACCESSORIES


Equipment Shelf **Mounting Device**

Quam WS Series

Kit #113 is a set of brackets & hardware to mount one (1) QC20/RP panel between the support arms and below the WS Series shelf surface.

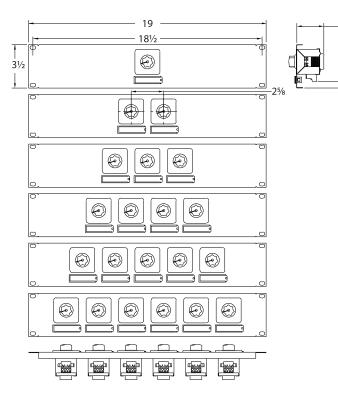

Recommended construction sequences, installation instructions, and A&E Specifications are available in various formats in the QUAM Architects' and Engineers' Resources section on the web at: www.QuamSpeakers.com









QUAM-NICHOLS COMPANY, INC. 234 East Marquette Rd. Chicago, IL. 60637 Tel: 1-800-NEED-NOW (800-633-3669) Fax: 1-888-NEED-NOW (888-633-3669) e-mail: NeedNow@QNC.com www.QuamSpeakers.com