

EN1210W Door/Window Transmitter with Reed Switch


The Inovonics door/window transmitter with reed switch includes a built-in, side mounted magnetic reed switch, with a magnet that supports a 5/8" gap.

Product Features

- Contains wired input and magnetic reed switch input
- Fully supervised
- Includes case tamper protection


Product Specifications

Weight:	1.9 oz
Typical battery life:	3 – 5 years
Internal battery type:	Panasonic CR123A
Accessories:	ACC1210-10, EN1210/EN1212 white housing 10 pack, ACC1210B-10 EN1210/EN1212 brown housing 10 pack
External contacts:	Normally open or normally closed
External contact cabling requirements:	14 - 22 gauge wire, unshielded, 10 foot maximum length
Distance, external contact to transmitter:	10 feet maximum
Distance, magnet to internal contact magnetic reed switch:	5/8"
Operating environment:	
Temperature:	-4 to 140°F using internal battery
Humidity:	Up to 90% (non-condensing)
Market:	North America, Australia, New Zealand
EchoStream® frequency:	902-928 MHz, frequency hopping spread spectrum
Check-in time frequency:	3 minutes
Regulatory compliance:	FCC, RoHS, Industry Canada


Mounting plate


The transmitter mounting plate hinges to the transmitter. Just mount the plate and snap the transmitter in place.

Inputs

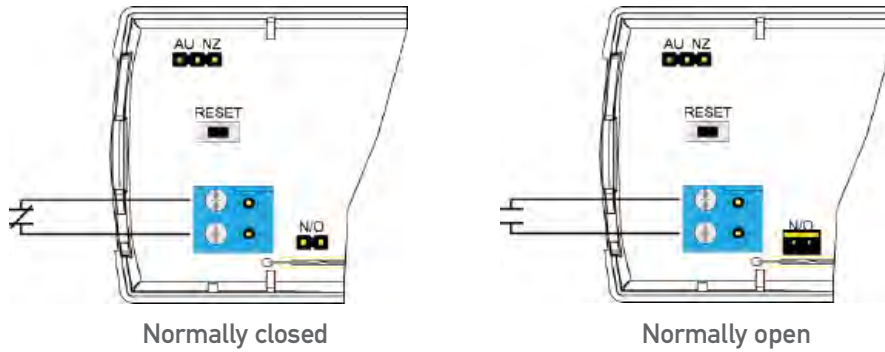

Dimensions

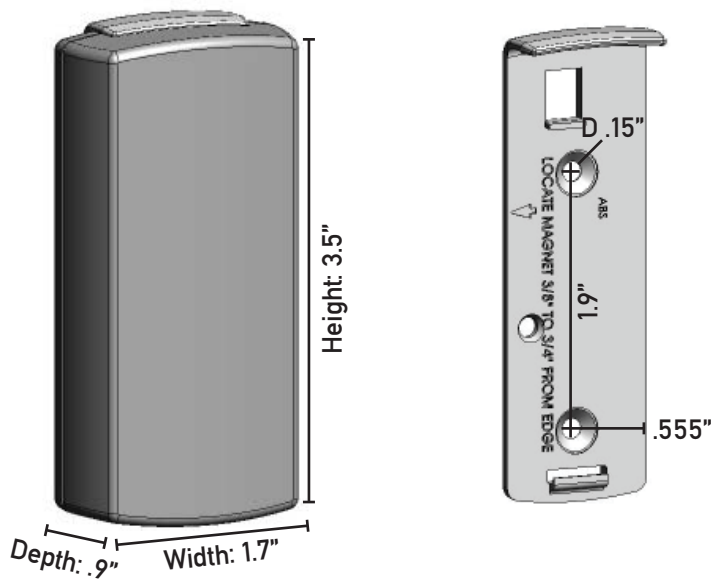

Reference Materials (available at www.inovonics.com)

EN1210W/EN1210W-60 EchoStream® Door/Window Transmitter with Reed Switch

EchoStream Developer Guide

Inovonics Product Catalog: North America

- The range and performance of any wireless product depends on the structure and environment in which it operates.
- Continual enhancements to our products may cause specifications to change without notice.
- Patents: 7,154,866; 7,554,932; 7,746,804; others pending.

Technical documents

For technical documents visit us at <http://www.inovonics.com/support/tech-documents/> or use the QR code below.

