

PK543A Apartment Intercom Amplifier for 5-, 4- & 3-Wire Remote Stations IL482 Specification Sheet

Tek-ENTRY® Apartment Entry Systems • Rev. 14 - 11/2016

Features

- Easy installation
- Low-voltage operation
- Multiple applications
- Precision engineering


Description

The PK543A Apartment Intercom Amplifier is a self-contained unit that does not require an external amplifier. The PK543A is designed for use with 3-, 4- or 5-wire apartment remote stations and provides amplification, control and power circuits needed to operate a complete apartment intercom system. Voice volume control and tone volume control are easily adjustable through the screwdriver opening on the front panel.

Additional functions include multiple door entrance operation with the PK502B; AC, DC or Maglock configurations with three selectable delayed door timing modes; post office door lock release; steady or warble call tones; power LED; selectable door button hold timeout; and selectable talk before door interlock (available for 4-wire stations only).

Specifications

Dimensions:	Height: 5.5" (140 mm)
	Width: 3.125" (80 mm)
	Depth: 2" (51 mm)
Construction:	Flame-retardant (UL® 94V-0) plastic
Amplification:	Integrated Circuit amplifier including amplifier with frequency response, adjusted for ideal voice quality.
Call Tone:	Integrated circuit oscillator with steady and warble modes
Door Release:	AC, DC or Maglock (12 VDC/24 VDC)
Controls:	Voice Volume, Tone Volume and Dipswitches for selectable modes
Connections:	Polarized plug-in type
Power Required:	16 VAC, 10 VA
Mounting:	Surface mount

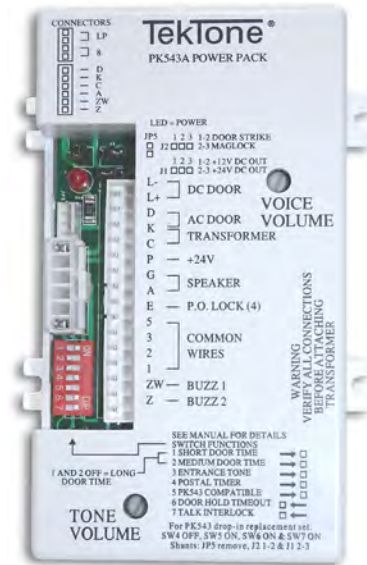

**PK543A Apartment Intercom Amplifier
for 5-, 4- & 3-Wire Remote Stations**

Required Components

AM-series or CM-series Entrance Panels
IR-series Remote Stations
SS102A or SS106 Transformers