

**1700A**

"A" Grip

**1700B**

"B" Grip

**1700C**

"C" Grip

**2000C**

"C" Grip



1. All Trims are furnished with wrought plates and extruded or cast solid grips.
2. Specify Grip Design (A,B,C) ("A" Grip furnished standard for 1700 Series Trim, "C" Grip furnished standard for 2000 Series Trim)
3. 630 Trim is furnished for 628 Devices.
4. 626 Trim is furnished for 626W Devices.

**Retrofit Applications**

The R1700 Series Trim is designed to retrofit into other manufacturers' installations when used with the wide stile Apex Series Devices.

**Consult factory for details.**

**4900A**

"A" Lever

**4900B**

"B" Lever

**4900C**

"C" Lever

**4900D**

"D" Lever

**4900K**

"K" Knob

**V4908A****Vandal Resistant Trim**

A heavy duty lever trim designed to withstand abuse and vandalism. Composed of extra strength shock-absorbing "overload" springs and heavy duty investment cast stainless steel internal components. Lever returns to the "home" position eliminating the need to reset the lever.

**Retrofit Applications**

The R4900 Series Trim is designed to retrofit into other manufacturers' installations when used with the wide stile Apex Series Devices.

**Consult factory for details.**

1. All the escutcheons and levers are castings or forgings.
2. Specify Lever or Knob Design (A,B,C,D,K) and Handing ("A" Lever x RHRB furnished standard)
3. 626 Trim furnished for 626W, 628 and 630 Devices.
  - For Trim dimensions see page 38.
  - Trims are BHMA certified for ANSI 156.3, Grade 1.
  - Trims are through bolted and will cover 161 and 86 cutouts (except for 2000C Trim).
  - Cylinder, Rim Type, not furnished standard. For cylinder details see page 19.

| ANSI Function      | 01<br>Exit Only<br>(cover plate)       | 02<br>Dummy<br>Trim                         | 03<br>Key<br>Retracts<br>Latchbolt          | 05<br>Key<br>Locks/Unlocks<br>Thumbpiece | 08<br>Key<br>Locks/Unlocks<br>Lever/Knob | 10*<br>Double Cylinder<br>Inside Key<br>Locks/Unlocks<br>Lever/Knob | 14<br>No Cylinder<br>Lever/Knob<br>Always<br>Active | 15<br>No Cylinder<br>Thumbpiece<br>Always<br>Active |
|--------------------|--|---|---|--|--|---|---|---|
| <b>Device Nos.</b> | 2101<br>FL2101                         | 2102  | 2103**<br>FL2103**                          | 2105<br>FL2105                           | 2108<br>FL2108                           | 2110<br>FL2110  | 2114<br>FL2114                                      | 2115<br>FL2115                                      |
| <b>Trim Nos.</b>   | 1701<br>R1701<br>2001<br>4901<br>R4901 | 1702A<br>R1702A<br>2002C<br>4902A<br>R4902A | 1703A<br>R1703A<br>2003C<br>4903A<br>R4903A | 1705A<br>R1705A<br>2005C                 | 4908A<br>V4908A<br>R4908A<br>RV4908A     | 4908A<br>V4908A<br>R4908A<br>RV4908A                                | 4914A<br>R4914A                                     | 1715A<br>R1715A<br>2015C                            |

**Device with Trim:**

Device No. \_\_\_\_\_

Add **Prefix** for options,  
see page 4.Add **Suffix**: for options, see page 4.Add **Prefix**: "V" Vandal Resistant Lever Trim  
"R" Retrofit TrimAdd **Suffix**: Lever or Knob Design (A,B,C,D, K)  
Grip Design (A,B,C)Add **Suffix**: "KNR" Knurled Lever or Grip**TS2108CD x V4908AKNR x RHRB x 630 x S300 x 3'-0" x 7'-0" x 1-3/4"**

Device w/options

Trim No.

Hand

Finish

Strike

Door Size

**Device Only:** Device no., hand, finish, strike, and door size including thickness:  
(e.g. TS2108CD x RHRB x 630 x S300 x 3'-0" x 7'-0" x 1-3/4")

**Trim Only:** Trim no., hand, finish, strike, and door size including thickness: (e.g. V4908A x RHRB x 626 x 1-3/4")

\* "10" Function is handed

\*\* 2103 & FL2103 x Cylinder Only Application includes Cylinder Attachment Kit "CA-03"

## WIRELESS ACCESS MANAGEMENT SYSTEM (continued)

### B) BEST® EXQ Trim

The BEST® EXQ Trim provides battery powered online lock/unlock capability for applications utilizing exit device hardware. Used in conjunction with the STANLEY® WQX-PG Portal Gateway and Software, the EXQ trim can receive a wireless command for Lock/Unlock activation. In doing so, the respective facility has immediate efficient pull-side access control for openings that utilize exit device hardware. The EXQ comes standard with a (DS) Door Position Switch. In addition, the trim is equipped with lead wires to integrate the Q2000 Touchbar and Latchbolt Monitoring switches.

The BEST EXQ trim is offered with four different activation styles to choose from. These four types are listed below.

1. **MS** – Magnetic Stripe
2. **DV** – Dual Validation (Magnetic Stripe + Keypad)
3. **PH** – HID Proximity
4. **PM** – Indala Proximity

#### EXQ Trim Features

- Handing (Field reversible)

#### EXQ Trim Specifications

**Materials** – Internal parts are brass, zinc, or corrosion treated steel.

**Escutcheons** – 11.7" H x 3.4" W x 1.2" D.

**Door thickness** – Standard lock configuration designed for doors 1 3/4" (44mm) – 2 1/4" (57mm) thick.

**Lever handle** – Brass, bronze, or stainless steel base material. Lever styles 14 and 15 return to a minimum of 1/2" (12mm) of door surface.

**Finishes** – **606** – satin brass, clear coated,

**613\*** – oxidized satin bronze, oil rubbed,

**626** – satin chromium plated (brass base material),

**690\*\*** – dark bronze coated (brass base material)

\* 613 finish is designed to wear over time, providing an "antique" appearance.

\*\* 690 finish will continue as a dark brown appearance over time.



**A) Precision™  
Q2103 Exit Device**

**B) BEST®  
EXQ Trim**

#### EXQ Trim Exit Device Compatibility

##### Apex 2000 Series Wide Style Exit Devices:

- Rim device – **2103**
- Surface vertical rod – **2203**
- Concealed vertical rod – **2703**
- Mortise – **2303**

**Note:** includes key-override

#### EXQ Trim Reader Styles



#### EXQ – Function

| With key override                         | Latchbolt operated by:   |
|---|--|
|   | <ul style="list-style-type: none"> <li>• Outside key</li> <li>• Outside lever-unless locked by internal motor drive mechanism</li> <li>• Touchbar</li> </ul> |
|   | <b>Outside lever locked by:</b>  |
|   | <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal</li> </ul>                              |
|   | <b>Outside lever unlocked by:</b>  |
|   | <ul style="list-style-type: none"> <li>• Internal motor drive mechanism operated by time-activated electronic signal or by valid card/PIN</li> </ul>         |
| <b>Inside hardware is always unlocked</b> |  |


For more information on other trims or trim readers refer to: BEST® EZ series, NT500, B.A.S.I.S. G, B.A.S.I.S. V, and Wireless Access Management catalogs.

Wireless Access Management System continued on pages 30 and 32

## STRIKES

### Rim Exit Devices

For Minimum Stile Widths see pages 36 and 37.

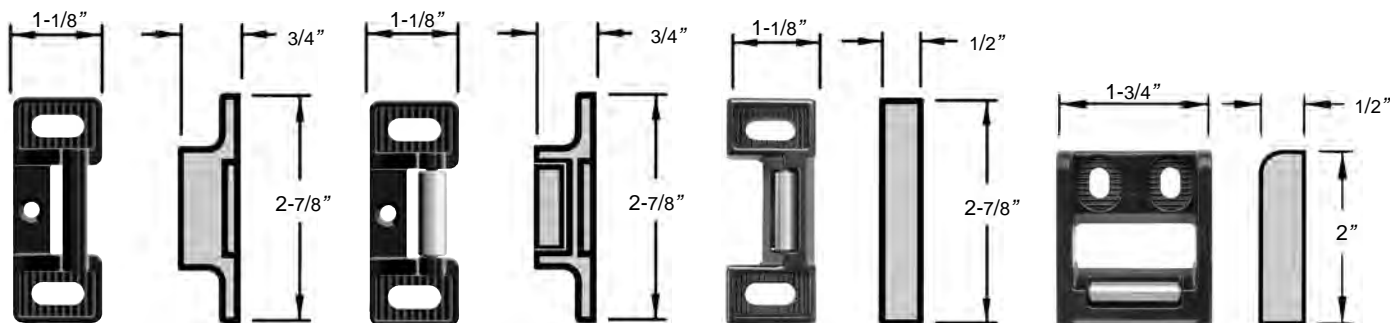

#### S300 Standard

For Rim and Top Strike for SVR Devices. Specify for FL2400 Devices on Pair of Doors with Mullion. Black Powder Coated Investment Cast Stainless Steel.

#### S301 Optional

For Rim and Top Strike for SVR Devices. Black Powder Coated Investment Cast, Stainless Steel Base and Roller.

#### S458 Optional


For Rim Devices. Black Powder Coated Investment Cast, Stainless Steel Base and Roller.

#### S988 Standard

For Narrow Stile Rim Devices. Black Powder Coated Investment Cast, Stainless Steel Base and Roller. Includes Rub Strip.

### Vertical Rod Exit Devices

Top Strike - For Surface Vertical Rod Devices, S300 standard and S301 optional, see above.

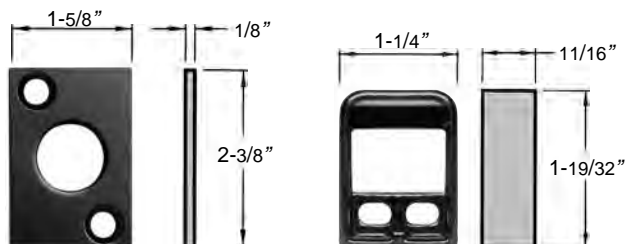


#### S460 Bottom Strike

For Vertical Rod Devices, Surface or Concealed. Black Powder Coated Steel.

#### S519 Top Strike

For Concealed Vertical Rod Devices. Black Powder Coated Investment Cast Stainless Steel.

### 2100 Rim x Vertical Rod Exit Device

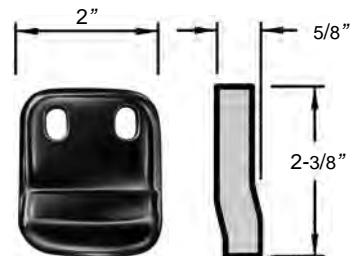


#### S459 Optional Rim Strike

For Non Fire Rated 2100 Rim x Vertical Rod Device on a Pair of Doors without a Mullion. Black Powder Coated Investment Cast Stainless Steel.

### Mortise Exit Devices

Open Back Strikes allow a pair of doors to open and close independently. Strikes are handed. Specify Hand same as Mortise Lock (e.g. RHRB).

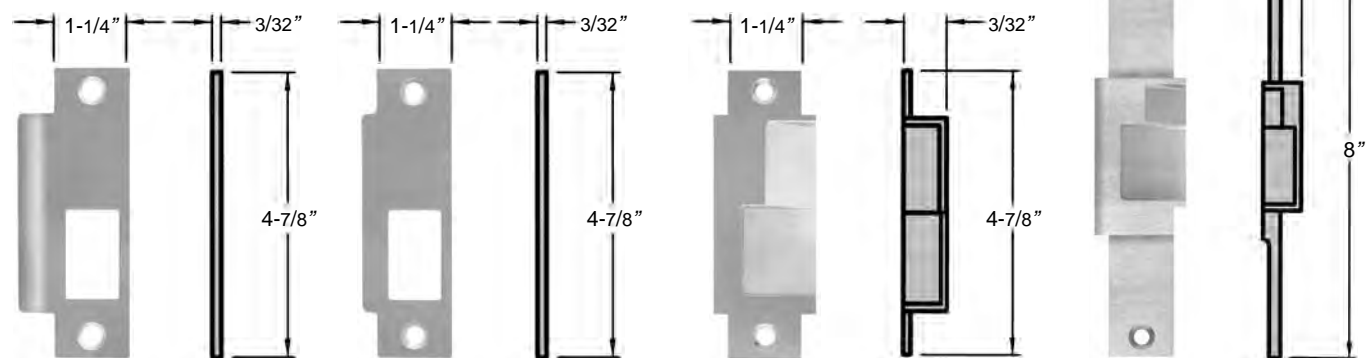

#### S982 Standard

Curved lip.

#### S983 Optional

7/8\" Flat Lip to center.

For overlapping astragal.

#### S984 Optional

Open Back Strike  
For 4-7/8\" x 1-1/4\" door edge cutout.

#### S985 Optional

Open Back Strike  
For 8\" x 1-1/4\" door edge cutout.