

Conventional Keeper  
(one moving part)



Lock down holes for  
added stability

## Features

- No frame cutting required – **Surface Mounted**
- Higher grade stainless steel ensures superior keeper strength
- Compatible with most major exit devices
- Accommodates exit devices with latch projections from 1/2" to 3/4" (13mm - 19mm)
- Ensure proper latch alignment with horizontal adjustment up to 1/4" (6.4mm) to compensate for door misalignments
- Field selectable voltage input – 12 or 24VDC and 12 to 24VAC (even 11 to 16VAC)
- Horizontal solenoid prevents manipulation from vibration
- Modular plug-in wire connectors
- Selectively brushed stainless steel finish
- Non-handed
- Hex socket head cap screws for added support and tamper resistance
- Mounting spacer included to provide enhanced latch engagement
- Tamper resistant
- Conventional keeper design - promotes even load distribution
- Installation tool included (hex key)



## 0162 & F0162

Designed especially to operate with rim exit devices. The 0162 and F0162 are completely surface mounted, no more cutting of the frame. The rugged stainless steel design accommodates hollow metal, aluminum and wood door frames.

The one piece conventional keeper promotes even load distribution in the event of an attempted forced entry. The 0162 and F0162 heavy duty housing is reinforced to eliminate twisting in the case of imperfect frames. The aesthetically pleasing design even takes into consideration personal injury because its smooth radius design reduces chances of catching.

With a 3hr Fire Rating and no cutting of the frame the F0162 is the perfect solution for a Fire Rated Door application when a rim exit device is being used.

*In or Out... we make it Easy!®*

## Installation Tool Included!

### Dimensions

1-3/4" x 9" x 3/4"  
(45mm x 230mm x 20mm)

## Certifications & Testing

- 5-year limited warranty
- UL 1034 Listed for 1500 lbs of static strength
- Factory tested to over 4 million cycles of operation
- F0162 has a 3 hour fire-rating to UL10C
- US Patent 7,722,097

## Accessories

**0162DDH** – Double door housing\*


**0162MSK** – Mounting Spacer Kit  
1/16" (1.5mm)  
(Additional spacer included)

\*To accommodate non-rated double doors.

## Applications

- Commercial Centers • Retail Outlets
- Industrial Buildings • Health Care Facilities
- Educational Facilities • Office Complexes

## Frame & Lock Type

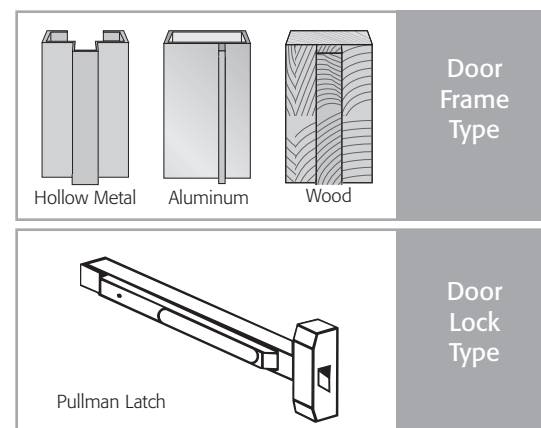




RUTHERFORD CONTROLS  
A DORMA Group Company

*In or Out... we make it Easy!®*

Specifications							
Model	Mode	Voltage	Current	Duty	Sound	Amps	Ohms
(F)0162	Fail Locked	12V	AC	Intermittent	Buzz	0.33	22
		12V	DC	Continuous	Silent	0.50	22
(F)0162	Fail Locked	24V	AC	Intermittent	Buzz	0.64	22
		24V	DC	Continuous	Silent	0.24	89
(F)0162	Fail Locked	11V	AC	Intermittent	Buzz	0.32	22
		16V	AC	Intermittent	Buzz	0.50	22

AC = Alternating Current  
DC = Direct Current

Intermittent Duty = Energized less than 1 min. with Duty Ratio 1:5  
Continuous Duty = Energized 1 min. or more

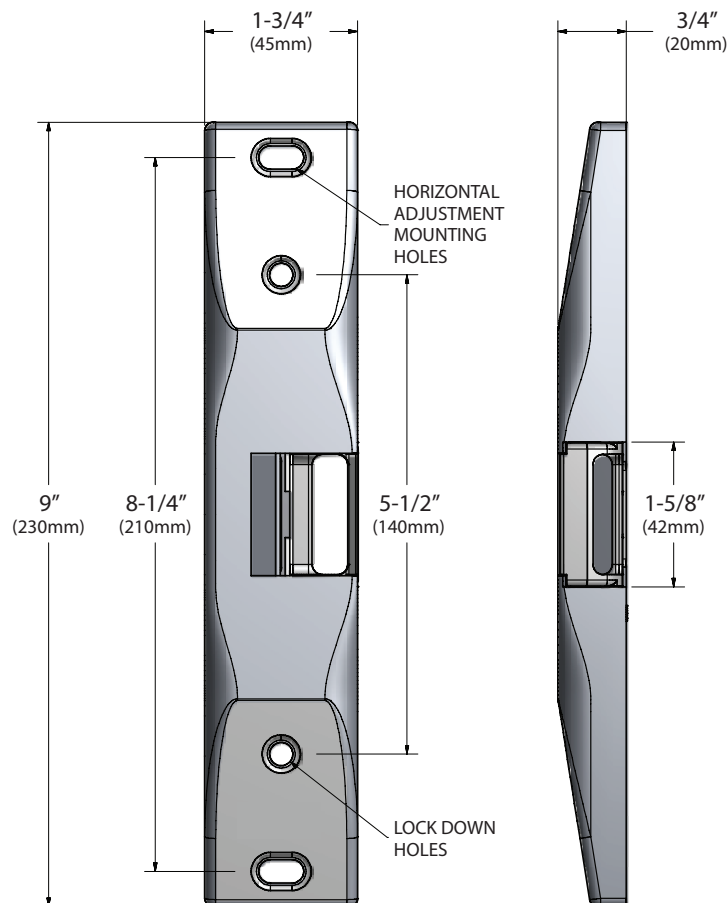

**NOTE:** Not to scale. Specifications are subject to change without notice.

RCI also offers a complete line of Electromagnetic Locks, Electric Locks, Power Supplies, Switches, Key pads & Readers, Exit Devices, Systems & Door Hardware.