

## Features

- 3 standard configurations.
- Use push button or pull cord to place a call.
- Choose whether to include pull cord during installation.
- Illuminated faceplate.
- Call assurance LED flashes when call is placed.
- Water resistant with gasket for wet environments and easy cleaning.
- UL/cUL<sup>®</sup>1069 and UL<sup>®</sup>2560 Listed.
- RoHS Compliant.

## Description

The SF123 2-Button Pull-Cord Station includes a call button, optional pull cord, an LED for call indication, a reset button, and an illuminated faceplate. The optional RP187K water-resistant seals allow the stations to be used in wet environments, such as showers, baths or tub rooms. When a call is placed, it is registered at the master station, room controller with dome light, zone lights, and duty station.

Configure the station's call type using the system's Config Tool software. Standard call types include emergency, code blue, and bath. The included inserts slide in to identify the buttons. Custom button call types and inserts can be created using the Config Tool software.

Mount the station using an IH121K Single-Gang Mounting Kit, or mount two stations together using an IH122K Dual-Gang Mounting Kit. The station snaps into the kit's plastic bezel and then onto the kit's surface mounting plate, leaving no visible screw holes.


## Listings



The Tek-CARE<sup>®</sup>120 nurse call system is listed by Underwriters Laboratories, Inc. to the UL<sup>®</sup>1069 seventh edition standard for Hospital Signaling and Nurse Call Equipment, the UL<sup>®</sup>2560 standard for Emergency Call Systems, and cUL<sup>®</sup> listed to CSA C22.2 No. 205. UL<sup>®</sup> File Number E71599.



RoHS Compliant.

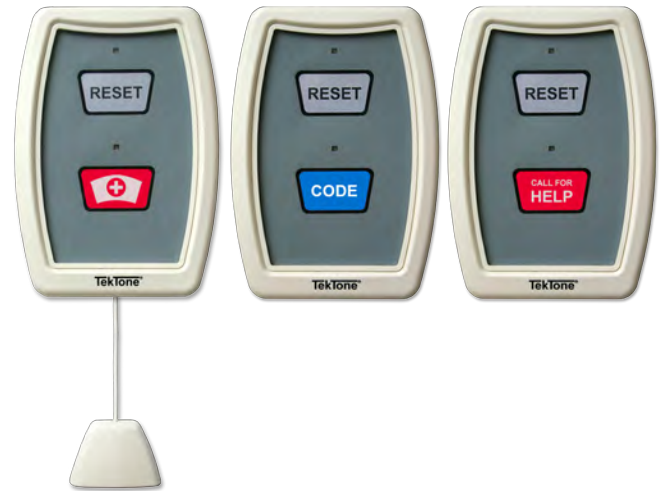

SF123 Customizable 2-Button Pull-Cord Station

## Specifications

Dimensions:	4.58"H × 3.25"W × 1.03"D (116 mm × 83 mm × 26 mm)
Environment:	0°C–60°C
Construction:	PC board with quality electronic components mounted on a flame-retardant (UL <sup>®</sup> 94V-0) plastic faceplate.
Mounting:	Attach included back plate to a standard single gang ring or single gang ring and box.
Connections:	2-wire flying lead

## Required Components

IH121K Single-Gang or IH122K Dual-Gang Mounting Kit  
NC120 Central Equipment Module  
NC415 Master Station  
LI122/ LI122BL Room Controller with Dome Light  
or PM120 Room Controller

## Optional Components

RP187K gaskets to install in wet environments (5 each)  
RP131K Single-Gang Blank Plate (5 each)