

AF30-30-00-.. / AF30Z-30-00-.. 3-pole Contactors AC / DC Operated - with Screw Terminals

AF30(Z) contactors are used for controlling power circuits up to 690 V AC and 220 V DC.

They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads.

- AF..(Z) contactors include an electronic coil interface providing reduced pull-in and holding consumption, particularly for AC control circuits
- Only four coils are needed to cover control voltages between 24...500 V 50/60 Hz or 20...500 V DC.

AF..(Z) offer extended operating limits and are suitable worldwide for different control voltages. e.g.: the coil 100...250 V 50/60 Hz - DC is suitable for Europe (230 V 50 Hz) and for North America (120 V 60 Hz and 208 V 60 Hz).

AF..(Z) contactors can manage large control voltage variations

- AF.Z contactors equipped with a 24...60 V 50/60 Hz - 20...60 V DC coil allow direct control by 24 V DC 500 mA PLC-output
- AF.Z contactors withstand short voltage dips and voltage sags (SEMI F47-0706 compliance)
- AF..(Z) contactors have built-in surge protection and do not require additional surge suppressors.



		15 kW	
		20 hp	

3D CAD outline drawings available on «Control Product 3D» portal

Ordering Details

IEC	UL/CSA	Control voltage	Main contacts	Auxiliary contacts fitted	Type	Order code	EAN	Weight
Rated power	3-phase motor rating	Uc min. ... Uc max.						
400 V								
AC-3	480 V							
kW	hp	V 50/60 Hz V DC						Pack ^(ing) 1 piece kg

3-pole Contactors

15	20	24...60	20...60	3 0	0 0	AF30-30-00-11	1SBL 277 001 R1100	3471523111219	0.310
		48...130	48...130	3 0	0 0	AF30-30-00-12	1SBL 277 001 R1200	3471523111226	0.310
		100...250	100...250	3 0	0 0	AF30-30-00-13	1SBL 277 001 R1300	3471523111233	0.310
		250...500	250...500	3 0	0 0	AF30-30-00-14	1SBL 277 001 R1400	3471523111240	0.350

Note: AF30-30-00-11 not suitable for a direct control by PLC-output. AF30-30-00-11 available in some countries: please consult your ABB representative.

3-pole Contactors - Low Consumption

15	20	-	12...20	3 0	0 0	AF30Z-30-00-20	1SBL 276 001 R2000	3471523114401	0.350
		24...60	20...60	3 0	0 0	AF30Z-30-00-21	1SBL 276 001 R2100	3471523114418	0.350
		48...130	48...130	3 0	0 0	AF30Z-30-00-22	1SBL 276 001 R2200	3471523114425	0.350
		100...250	100...250	3 0	0 0	AF30Z-30-00-23	1SBL 276 001 R2300	3471523114432	0.350

Note: Only AF.Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole

Certifications and Approvals

																			
CE	cULus	CCC	GOST	C-Tick															


Main Pole - Utilization Characteristics according to IEC

Standards	IEC 60947-1 / 60947-4-1 and EN 60947-1 / 60947-4-1	
Rated operational voltage U_e max.	690 V	
Rated frequency limits	25 ... 400 Hz	
Conventional free-air thermal current I_{th} acc. to IEC 60947-4-1, open contactors, $\theta \leq 40\text{ °C}$	50 A	
with conductor cross-sectional area	10 mm ²	
AC-1 Utilization category for air temperature close to contactor		
I_e / AC-1 rated operational current	$\theta \leq 40\text{ °C}$	50 A
U _e max. $\leq 690\text{ V}$, 50/60 Hz	$\theta \leq 60\text{ °C}$	42 A
	$\theta \leq 70\text{ °C}$	37 A
with conductor cross-sectional area	10 mm ²	
AC-3 Utilization category for air temperature close to contactor $\theta \leq 60\text{ °C}$ (for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz, 3-phase motors)		
I_e / AC-3 max. rated operational current	220-230-240 V	33 A
 3-phase motors	380-400 V	32 A
	415 V	32 A
	440 V	32 A
	500 V	28 A
	690 V	21 A
AC-3 rated operational power	220-230-240 V	9 kW
 1500 r.p.m. 50 Hz 1800 r.p.m. 60 Hz 3-phase motors	380-400 V	15 kW
	415 V	15 kW
	440 V	18.5 kW
	500 V	18.5 kW
	690 V	18.5 kW
Rated making capacity AC-3	10 x I _e AC-3 acc. to IEC 60947-4-1	
Rated breaking capacity AC-3	8 x I _e AC-3 acc. to IEC 60947-4-1	
AC-8a Utilization category (without thermal overload relay - U _e 400 V - $\theta \leq 40\text{ °C}$)		
I_e / AC-8a rated operational current	40 A	
AC-8a rated operational power	20 kW	
Short-circuit protection for contactors without thermal O/L relay - Motor protection excluded U _e $\leq 500\text{ V}$ AC - gG type fuse	63 A	
Rated short-time withstand current I_{cw}	1 s	700 A
at 40 °C ambient temperature, in free air from a cold state	10 s	350 A
	30 s	225 A
	1 min	150 A
	15 min	50 A
Maximum breaking capacity cos $\phi = 0.45$	at 440 V	500 A
	at 690 V	200 A
Heat dissipation per pole	I_e / AC-1	2.4 W
	I_e / AC-3	0.9 W
Max. electrical switching frequency	AC-1	600 cycles/h
	AC-3	1200 cycles/h
	AC-2, AC-4	150 cycles/h

Main Pole - Utilization Characteristics according to UL / NEMA / CSA

Standards		UL 508, CSA C22.2 N°14
Rated operational voltage Ue max.		600 V
NEMA size		-
NEMA continuous amp rating	thermal current	
NEMA maximum H.P. ratings 1-phase, 60 Hz	115 V AC	
	230 V AC	
NEMA maximum H.P. ratings 3-phase, 60 Hz	200 V AC	
	230 V AC	
	460 V AC	
	575 V AC	
UL General use rating		
600 V AC		50 A
With conductor cross-sectional area		AWG 8
80 V DC - 1-pole		50 A
With conductor cross-sectional area		AWG 8
UL maximum 1-phase motor rating		
Amp-rating	120 V AC	24 A
	240 V AC	28 A
Motor power	120 V AC	2 hp
	240 V AC	5 hp
UL maximum 3-phase motor rating		
Amp-rating	200-208 V AC	32.2 A
	220-240 V AC	28 A
	440-480 V AC	27 A
	550-600 V AC	On request
Motor power (for 1500 r.p.m., 50 Hz or 1800 r.p.m., 60 Hz 3-phase motors)	200-208 V AC	10 hp
	220-240 V AC	10 hp
	440-480 V AC	20 hp
	550-600 V AC	On request
Short-circuit protection		
for contactors without thermal O/L relay - Motor protection excluded		
Fuse rating		150 A
Fuse type, 600 V		NTD
Max. electrical switching frequency		
for general use		600 cycles/h
for motor use		1200 cycles/h

General Technical Data

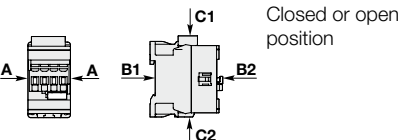
Rated insulation voltage U_i		
acc. to IEC 60947-4-1		690 V
acc. to UL / CSA		600 V
Rated impulse withstand voltage U_{imp}		6 kV
Electromagnetic compatibility		Devices complying with IEC 60947-1 / EN 60947-1 - Environment A
Ambient air temperature close to contactor		
Operation	fitted with thermal overload relay	-25 ... +60 °C
	without thermal overload relay	-40 ... +70 °C
Storage		-60 ... +80 °C
Climatic withstand		Category B according to IEC 60947-1 Annex Q
Operating altitude		≤ 3000 m
Mechanical durability		
Number of operating cycles		10 millions operating cycles
Max. switching frequency		3600 cycles/h
Shock withstand		
acc. IEC 60068-2-27 and EN 60068-2-27		
Mounting position 1		
		
Shock direction		1/2 sinusoidal shock for 11 ms: no change in contact position
A		30 g
B1		25 g Closed position / 5 g Open position
B2		15 g
C1		25 g
C2		25 g
Vibration withstand		
acc. to IEC 60068-2-6		5 ... 300 Hz
		4 g Closed position / 2 g Open position

Magnet System Characteristics

Coil operating limits		AC supply	at $\theta \leq 60$ °C 0.85 x U_c min ... 1.1 x U_c max
acc. to IEC 60947-4-1			at $\theta \leq 70$ °C 0.85 x U_c min ... U_c max
		DC supply	at $\theta \leq 60$ °C 0.85 x U_c min ... 1.1 x U_c max
			at $\theta \leq 70$ °C (AF) 0.85 x U_c min ... U_c max - (AF..Z) 0.85 x U_c min ... 1.1 x U_c max
AC control voltage		Rated control circuit voltage U_c	24 ... 500 V AC
50/60 Hz	Coil consumption	Average pull-in value	(AF) 50 VA - (AF..Z) 16 VA
		Average holding value	(AF) 2.2 VA / 2 W - (AF..Z) 1.7 VA / 1.5 W
DC control voltage		Rated control circuit voltage U_c	12 ... 500 V DC
	Coil consumption	Average pull-in value	(AF) 50 W - (AF..Z) 12 ... 16 W
		Average holding value	(AF) 2 W - (AF..Z) 1.7 W
PLC-Output control			(AF..Z) ≥ 500 mA 24 V DC
Drop-out voltage in % of U_c min.			≤ 60 % U_c min
Voltage sag immunity according to SEMI F47-0706			(AF..Z) conditions of use on request
Dips withstand (level 0% according to IEC 61000-4-11)			(AF..Z) 22 ms average for $U_c = 24$... 250 V 50/60Hz
-20 °C ≤ θ ≤ +60 °C			
Operating time			
between coil energization and:		N.O. contact closing	40 ... 95 ms
		N.C. contact opening	38 ... 90 ms
between coil de-energization and:		N.O. contact opening	11 ... 95 ms
		N.C. contact closing	13 ... 98 ms

Mounting Characteristics

Mounting positions

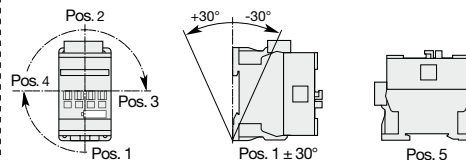

Max. N.C. built-in and add-on N.C. auxiliary contacts: see accessory fitting details for a 3-pole contactor AF09 ... AF38

Mounting distances

The contactors can be assembled side by side.

Fixing

on rail according to IEC 60715, EN 60715
by screws (not supplied)

35 x 7.5 mm or 35 x 15 mm
2 x M4 screws placed diagonally

Connecting Characteristics

Main terminals



Screw terminals with cable clamp

Connecting capacity (min. ... max.)

Main conductors (poles)

	Rigid	solid ($\leq 4 \text{ mm}^2$)	1 x	2.5 ... 10 mm ²
		stranded ($\geq 6 \text{ mm}^2$)	2 x	2.5 ... 10 mm ²
	Flexible with non insulated ferrule		1 x	1.5 ... 10 mm ²
	Flexible with insulated ferrule		2 x	1.5 ... 10 mm ²
			1 x	1.5 ... 10 mm ²
			2 x	1.5 ... 4 mm ²
	Bars or lugs		L <	12.5 mm

Capacity according to UL/CSA 1 or 2 x AWG 14 ... 8

Stripping length 14 mm

Auxiliary conductors

(built-in auxiliary terminals + coil terminals)

	Rigid solid		1 x	1 ... 2.5 mm ²
	Flexible with non insulated ferrule		2 x	1 ... 2.5 mm ²
	Flexible with insulated ferrule		1 x	0.75 ... 2.5 mm ²
			2 x	0.75 ... 2.5 mm ²
			1 x	0.75 ... 2.5 mm ²
			2 x	0.75 ... 1.5 mm ²
	Bars or lugs		L <	8 mm

Capacity according to UL/CSA 1 or 2 x AWG 18 ... 14

Stripping length 10 mm

Degree of protection

acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529

Main terminals	IP20
Coil terminals	IP20
Built-in auxiliary terminals	

Screw terminals

(delivered in open position, screws of unused terminals must be tightened)

Main terminals	M4
Coil terminals	M3.5
Built-in auxiliary terminals	


Screwdriver type

Flat Ø 5.5 / Pozidriv 2

Tightening torque


Main pole terminals	2.5 Nm / 22 lb.in
Coil terminals	1.2 Nm / 11 lb.in
Built-in auxiliary terminals	

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.



Main Accessories

Ordering Details



Description		Auxiliary contacts 	Type	Order code	EAN	Pack ^(ing) piece	Weight kg (1 pce)
Additional auxiliary contact blocks	Front-mounted instantaneous auxiliary contact blocks	0 1 - -	CA4-01	1SBN 010 110 R1001	3471523130029	1	0.014
		1 0 - -	CA4-10	1SBN 010 110 R1010	3471523130005	1	0.014
		0 1 - -	CA4-01-T	1SBN 010 110 T1001	3471523130395	10	0.014
		1 0 - -	CA4-10-T	1SBN 010 110 T1010	3471523130371	10	0.014
	Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact	- - 0 1	CC4-01	1SBN 010 111 R1001	3471523130432	1	0.014
		- - 1 0	CC4-10	1SBN 010 111 R1010	3471523130425	1	0.014
	Side-mounted instantaneous auxiliary contact blocks	1 1 - -	CAL4-11	1SBN 010 120 R1011	3471523130043	1	0.040
		1 1 - -	CAL4-11-T	1SBN 010 120 T1011	3471523130418	10	0.040
	Front-mounted instantaneous auxiliary contact blocks	0 4 - -	CA4-04E	1SBN 010 140 R1004	3471523130159	1	0.055
		2 2 - -	CA4-22E	1SBN 010 140 R1022	3471523130128	1	0.055
		3 1 - -	CA4-31E	1SBN 010 140 R1031	3471523130135	1	0.055
		4 0 - -	CA4-40E	1SBN 010 140 R1040	3471523130142	1	0.055
	Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks	1 1 - -	CAT4-11E	1SBN 010 151 R1011	3471523130067	1	0.040
Interlocks	Mechanical interlock unit		VM4	1SBN 030 105 T1000	3471523130609	10	0.005
	Mechanical and electrical interlock set	1 1 - -	VEM4	1SBN 030 111 R1000	3471523130616	1	0.035
	Fixing clips		BB4	1SBN 110 120 W1000	3471523130722	50	0.002
Connection accessories for starting	Connecting links with manual motor starters		BEA26-4	1SBN 082 306 T1000	3471523130746	10	0.025
			BEA38-4	1SBN 082 306 T2000	3471523130753	10	0.030
	Connection sets for reversing contactors		BER38-4	1SBN 082 311 R1000	3471523130784	1	0.100
Additional coil terminal block	Additional coil terminal block		LDC4	1SBN 070 156 T1000	3471523130678	10	0.010
Protective covers	Protective covers		BX4	1SBN 110 108 T1000	3471523130708	10	0.006
			BX4-CA	1SBN 110 109 W1000	3471523130715	50	0.001
Function markers	Function markers		BA4	1SNA 235 156 R2700	3472592351568	16	0.011
			HTP500-BA4	1SNA 235 712 R2400	3472592357126	1	0.220
			SPRC 1	1SNA 360 010 R1500	3472593600108	1	0.290

Note:

- CAT4: not fittable on AF..Z contactors with DC control voltage 12...20VDC.
 - VM4: includes 2 fixing clips (BB4) to maintain together both contactors.
 - VEM4: includes a VM4 mechanical interlock unit with 2 fixing clips (BB4), a VE4 electrical interlock block and A2-A2 connection.
- VE4 block must be used with its A2-A2 connection to respect the electrical connection diagram.
VEM4 not fittable on AF..Z contactors with DC control voltage 12...20 V DC.

Terminal Marking and Positioning


Standard devices without addition of auxiliary contacts




AF30-30-00-.. / AF30Z-30-00-..

AF30-30-00-.. / AF30Z-30-00-..


Dimensions mm, inches

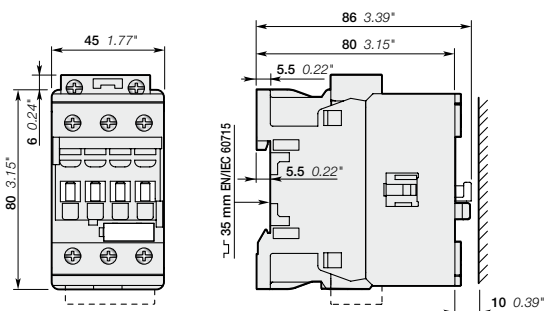


AF30




AF30

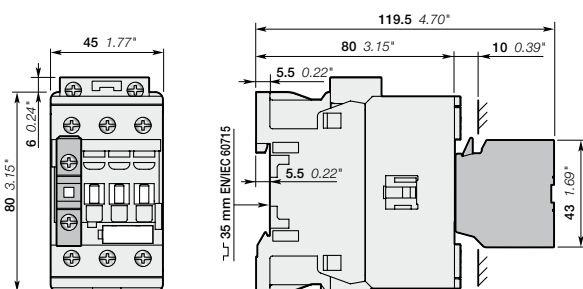


AF30
+ CA4, CC4 1-pole auxiliary contact block

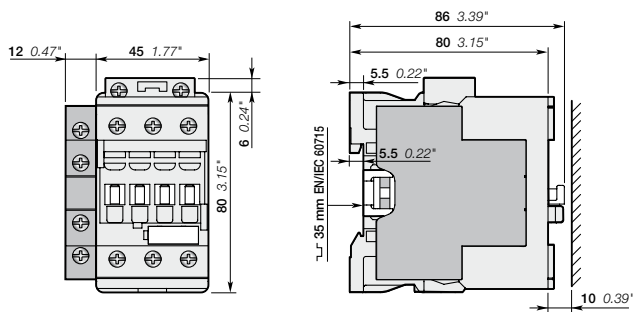


AF30
+ CAL4-11 2-pole auxiliary contact block

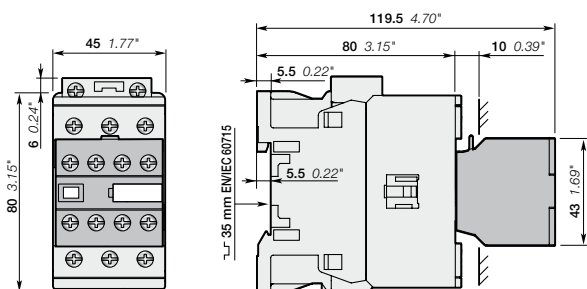


AF30
+ CA4 4-pole auxiliary contact block

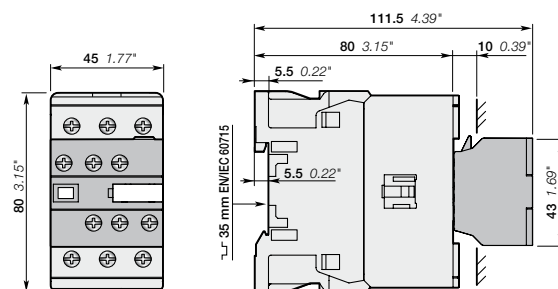

AF30
+ CAT4 2-pole auxiliary contact and coil terminal block

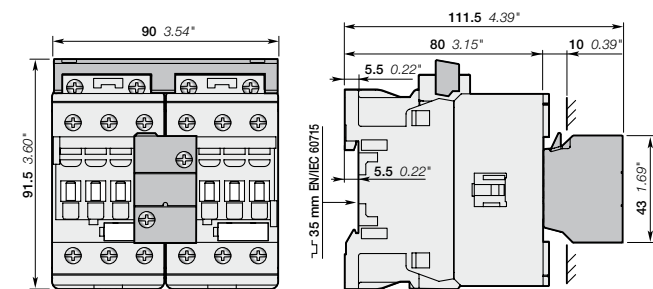

AF30
+ VEM4 mechanical and electrical interlock set

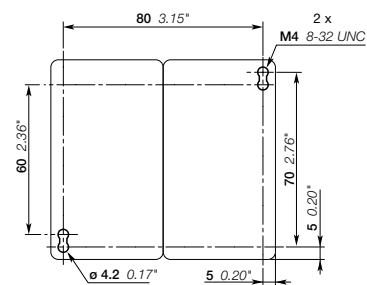

AF30
+ VEM4 mechanical and electrical interlock set

Note: contactor lateral distance to grounded component 2 mm 0.08" min.

Contact us

ABB France

Low Voltage Products Division

10, rue Ampère Z.I. - B.P. 114

F-69685 Chassieu cedex / France

**You can find the address of your local sales organisation
on the ABB home page**

<http://www.abb.com/contacts> -> Low Voltage products

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2011 ABB
All rights reserved