


760007484 | Z-036-DS-5K-FMUBK

Indoor/Outdoor Low Smoke Zero Halogen Riser Distribution Cable, 36 fiber multi-unit with 12 fiber subunits

Representative Image

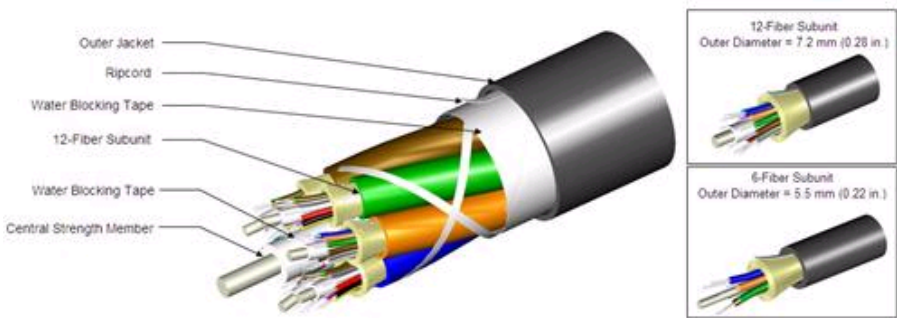

General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

Construction Materials

Fiber Type Solution	LazrSPEED® 550, 50 µm multimode fiber
Total Fiber Quantity	36
Fiber Type	LazrSPEED® 550, 50 µm multimode fiber
Fiber Type, quantity	36
Fibers Per Subunit, quantity	12
Jacket Color	Black
Jacket UV Resistance	UV stabilized

Dimensions

Buffer Tube/Subunit Diameter	7.20 mm 0.28 in
Cable Weight	163.0 lb/kft 242.0 kg/km
Diameter Over Jacket	17.10 mm 0.67 in
Subunit, quantity	3

Physical Specifications

Minimum Bend Radius, loaded	25.6 cm 10.1 in
Minimum Bend Radius, unloaded	17.1 cm 6.7 in
Tensile Load, long term, maximum	240 lbf 1068 N
Tensile Load, short term, maximum	800 lbf 3560 N

760007484 | Z-036-DS-5K-FMUBK

Vertical Rise, maximum 451.0 m | 1479.7 ft

Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3 IEC 60754-2 IEC 61034-2 IEEE 383 UL 1666 UL 1685

Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH) Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +75 °C (-40 °F to +167 °F)

Mechanical Test Specifications

Compression	126 lb/in 22 N/mm
Compression Test Method	FOTP-41 IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104 IEC 60794-1-2, Section 10
Impact	4.34 ft lb 5.88 N-m
Impact Test Method	FOTP-25 IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33 IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85 IEC 60794-1-2, Section 11
Water Penetration	24 h
Water Penetration Test Method	FOTP-82 IEC 60794-1-2, Section 24

Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28 IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3 IEC 60794-1-2, Section 22

Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-104-696-2001 EN 187105 Telcordia GR -20-CORE Issue 3 (water penetration) Telcordia GR-409-CORE Issue 2
-------------------------------	--

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



Included Products

CS-5K-TB (Product Component—not orderable) — LazrSPEED® 550 OM4 Multimode Fiber