


700009848 | N-004-DS-5M-FSUAQ  
Low Smoke Zero Halogen Riser Distribution Cable, 4 fiber single-unit

## Representative Image

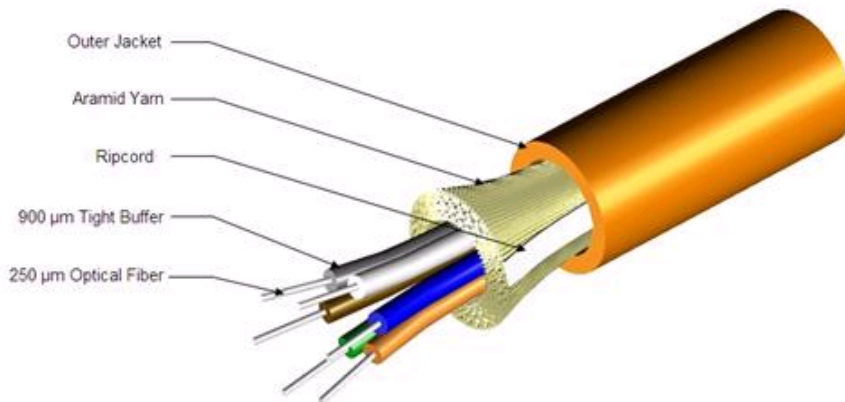

## General Specifications

Cable Type	Distribution
Construction Type	Non-armored
Subunit Type	Gel-free

## Construction Materials

Fiber Type Solution	LazrSPEED® 150, 50 µm multimode fiber
Total Fiber Quantity	4
Fiber Type	LazrSPEED® 150, 50 µm multimode fiber
Fiber Type, quantity	4
Jacket Color	Aqua

## Dimensions

Cable Weight	14.1 lb/kft   21.0 kg/km
Diameter Over Jacket	4.80 mm   0.19 in

## Physical Specifications

Minimum Bend Radius, loaded	7.2 cm   2.8 in
Minimum Bend Radius, unloaded	4.8 cm   1.9 in
Tensile Load, long term, maximum	400 N   90 lbf
Tensile Load, short term, maximum	1335 N   300 lbf

700009848 | N-004-DS-5M-FSUAQ

Vertical Rise, maximum 500.0 m | 1640.4 ft

## Flame Test Specifications

Flame Test Listing	NEC OFNR-LS (ETL) and c(ETL)
Flame Test Method	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Specifications

Environmental Space	Low Smoke Zero Halogen (LSZH)   Riser
Installation Temperature	-30 °C to +70 °C (-22 °F to +158 °F)
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

## Mechanical Test Specifications

Compression	10 N/mm   57 lb/in
Compression Test Method	FOTP-41   IEC 60794-1-2, Section 7
Flex	100 cycles
Flex Test Method	FOTP-104   IEC 60794-1-2, Section 10
Impact	4.34 ft lb   5.88 N-m
Impact Test Method	FOTP-25   IEC 60794-1-2, Section 8
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1-2, Section 5
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1-2, Section 11

## Environmental Test Specifications

Heat Age	-40 °C to +85 °C (-40 °F to +185 °F)
Heat Age Test Method	Not applicable
Low High Bend	-40 °C to +70 °C (-40 °F to +158 °F)
Low High Bend Test Method	FOTP-28   IEC 60794-1-2, Section 28
Temperature Cycle	-40 °C to +70 °C (-40 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1-2, Section 22

## Qualification Specifications

Cable Qualification Standards	ANSI/ICEA S-83-596-2001   Telcordia GR-409-CORE Issue 2
-------------------------------	---

## Regulatory Compliance/Certifications

Agency	Classification
RoHS 2002/95/EC	Compliant
ISO 9001:2008	Designed, manufactured and/or distributed under this quality management system



## Included Products

CS-5M-TB (Product Component—not orderable) — LazrSPEED® 150 OM2+ Multimode Fiber