



CVC5100BPVF	2.8 - 12mm auto iris varifocal lens, grey housing
CVC5100BPVFW	2.8 - 12mm auto iris varifocal lens, white housing
CVC5200BPVF	5 - 50mm auto iris varifocal lens, grey housing
CVC5200BPVFW	5 - 50mm auto iris varifocal lens, white housing




Features

- 1/3" Sony Super-Had II™ CCD
- 24 IR LEDs & 6 White LEDs
- 600 TV lines resolution
- Digital image stabilization
- 12VDC / 24VAC dual voltage operation
- Day & Night
- 5 year warranty

Specifications

Image Sensor	1/3" Sony Super-HAD II™ CCD
Resolution.....	600 TV lines
Minimum Illumination.....	CDS off: 0.15 lux CDS on: 0.00002 lux
IR Range	Up To 65'
White Balance	ATW / Outdoor / Indoor / Manual AWC (1,700°K - 11,000°K)
Gain Control	High / Low / Off
Backlight Compensation	BLC / HLC / Off
S/N Ratio	More than 52dB
Video Output.....	CVBS: 1.0Vp-p / 75 Ohm
Effective Pixels	811 (H) x 508 (V) 768 (H) x 494 (V)
Electronic Shutter Speed.....	1/60 sec. - 1/120,000 sec.
Sharpness	On / Off (level adjustable)
Privacy Masking	On / Off (12 programmable zones)
Scanning Frequency.....	15.734kHz (H) & 59.94Hz (V)
Scanning System.....	2:1 interlace
Synchronization	Internal
TV System.....	NTSC, PAL
Day & Night	Color / BW / Auto
Sense-Up.....	Auto / Off (selectable x2 - x512)
Motion Detection.....	On / Off (8 programmable zones)
Digital Zoom	On / Off (1x - 16x)

DIS.....	On / Off
Flip/Mirror	On / Off
SSDR.....	On / Off (level adjustable)
SSNR III (Digital Noise Reduction)....	On / Off (level adjustable)
Power Consumption	12VDC, 250mA (CDS off, PIR off) 600mA (CDS on, PIR on) Heater on adj: 200 - 600mA 24VAC 100mA (CDS off, PIR off), 250mA (CDS on, PIR on) Heater on adj: 120 - 250mA
Power Supply	12VDC / 24VAC (dual voltage) (power supply not included)
Operating Temperature/	
Humidity.....	14° F - 122° F / RH 95% Max.
Storage Temperature/	
Humidity.....	-4° F - 140° F / RH 95% Max.
Dimensions.....	3.5" (W) x 4" (H) x 8.7" (L)
Weight	3.5 lbs.

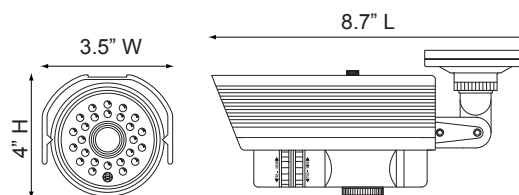

Optional Accessories



CVCJBB
Bullet Camera
Junction Box



INTJBS
Square Junction Box



INTCM
Corner/Pole Adaptor



PSW4
Power Supply



PSW5
Power Supply

Speco Technologies is constantly developing and improving products.

We reserve the right to modify product design and specifications without notice and without incurring any obligation.

Rev. 1/24/12

For more information contact Speco Technologies

200 New Highway, Amityville, NY 11701 • Toll Free: 1-800-645-5516 • Fax: 631-957-9142 or 631-957-3880
www.specotech.com