


Contact Utilization Characteristics according to IEC

Standards		IEC 60947-1 / 60947-5-1 and EN 60947-1 / 60947-5-1
Rated operational voltage U_e max.		690 V
Conventional free-air thermal current I_{th} θ ≤ 40 °C		16 A
Rated frequency limits		25 ... 400 Hz
Rated operational current I_e / AC-15		
acc. to IEC 60947-5-1	24-127 V 50/60 Hz	6 A
	220-240 V 50/60 Hz	4 A
	400-440 V 50/60 Hz	3 A
	500 V 50/60 Hz	2 A
	690 V 50/60 Hz	2 A
Making capacity AC-15		10 x I _e AC-15 acc. to IEC 60947-5-1
Breaking capacity AC-15		10 x I _e AC-15 acc. to IEC 60947-5-1
Rated operational current I_e / DC-13		
acc. to IEC 60947-5-1	24 V DC	6 A / 144 W
	48 V DC	2.8 A / 134 W
	72 V DC	1 A / 72 W
	110 V DC	0.55 A / 60 W
	125 V DC	0.55 A / 69 W
	220 V DC	0.27 A / 60 W
	250 V DC	0.27 A / 68 W
	400 V DC	0.15 A / 60 W
	500 V DC	0.13 A / 65 W
	600 V DC	0.1 A / 60 W
Short-circuit protection gG type fuse		10 A
Rated short-time withstand current I_{cw}	for 1.0 s	100 A
	for 0.1 s	140 A
Minimum switching capacity		12 V / 3 mA
with failure rate acc. to IEC 60947-5-4		10 ⁻⁷
Non-overlapping time between N.O. and N.C. contacts		≥ 2 ms
Heat dissipation per pole at 6 A		0.1 W
Max. electrical switching frequency	AC-15	1200 cycles/h
	DC-13	900 cycles/h

Main Pole - Utilization Characteristics according to UL / CSA

Standards	UL 508, CSA C22.2 N°14
Rated insulation voltage U_i	600 V
Max. rated voltage	600 V AC, 600 V DC
Pilot duty	A600, Q600
AC thermal rated current	10 A
AC maximum volt-ampere making	7200 VA
AC maximum volt-ampere breaking	720 VA
DC thermal rated current	2.5 A
DC maximum volt-ampere making-breaking	69 VA

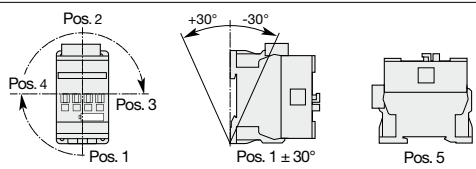
General Technical Data

Rated insulation voltage U_i		
acc. to IEC 60947-5-1		690 V
acc. to UL / CSA		600 V
Rated impulse withstand voltage U_{imp}		6 kV
Electromagnetic compatibility		Devices complying with IEC 60947-1 / EN 60947-1 - Environment A
Ambient air temperature close to contactor		
Operation in free air		-40 ... +70 °C
Storage		-60 ... +80 °C
Climatic withstand		Category B according to IEC 60947-1 Annex Q
Operating altitude		≤ 3000 m
Mechanical durability		
Number of operating cycles		20 millions operating cycles
Max. switching frequency		6000 cycles/h
Shock withstand acc. IEC 60068-2-27 and EN 60068-2-27		
Mounting position 1		
		Shock direction 1/2 sinusoidal shock for 11 ms: no change in contact position
		A 30 g
		B1 25 g Closed position / 5 g Open position
		B2 15 g
		C1 25 g
		C2 25 g
Vibration withstand		5 ... 300 Hz
acc. to IEC 60068-2-6		4 g Closed position / 2 g Open position

Magnet System Characteristics

Coil operating limits		AC supply	at $\theta \leq 60^\circ\text{C}$ 0.85 x U_c min ... 1.1 x U_c max at $\theta \leq 70^\circ\text{C}$ 0.85 x U_c min ... U_c max
acc. to IEC 60947-5-1		DC supply	at $\theta \leq 60^\circ\text{C}$ 0.85 x U_c min ... 1.1 x U_c max at $\theta \leq 70^\circ\text{C}$ (NF) 0.85 x U_c min ... U_c max - (NFZ) 0.85 x U_c min ... 1.1 x U_c max
AC control voltage 50/60 Hz	Rated control circuit voltage U_c		24 ... 500 V AC
	Coil consumption	Average pull-in value	(NF) 50 VA - (NFZ) 16 VA
		Average holding value	(NF) 2.2 VA / 2 W - (NFZ) 1.7 VA / 1.5 W
DC control voltage	Rated control circuit voltage U_c		12 ... 500 V DC
	Coil consumption	Average pull-in value	(NF) 50 W - (NFZ) 12 ... 16 W
		Average holding value	(NF) 2 W - (NFZ) 1.7 W
PLC-Output control			(NFZ) ≥ 500 mA 24 V DC
Drop-out voltage in % of U_c min.			≤ 60 % U_c min
Voltage sag immunity according to SEMI F47-0706			(NFZ) conditions of use on request
Dips withstand (level 0% according to IEC 61000-4-11)			(NFZ) 22 ms average for $U_c = 24 \dots 250 \text{ V } 50/60\text{Hz}$
Operating time			
between coil energization and:	N.O. contact closing		40 ... 95 ms
	N.C. contact opening		38 ... 90 ms
between coil de-energization and:	N.O. contact opening		11 ... 95 ms
	N.C. contact closing		13 ... 98 ms

Mounting Characteristics

Mounting positions		
Mounting distances		Max. add-on N.C. auxiliary contacts: see accessory fitting details for a NF contactor relay The contactor relays can be assembled side by side.
Fixing		
on rail according to IEC 60715, EN 60715		35 x 7.5 mm or 35 x 15 mm
by screws (not supplied)		2 x M4 screws placed diagonally

Connecting Characteristics

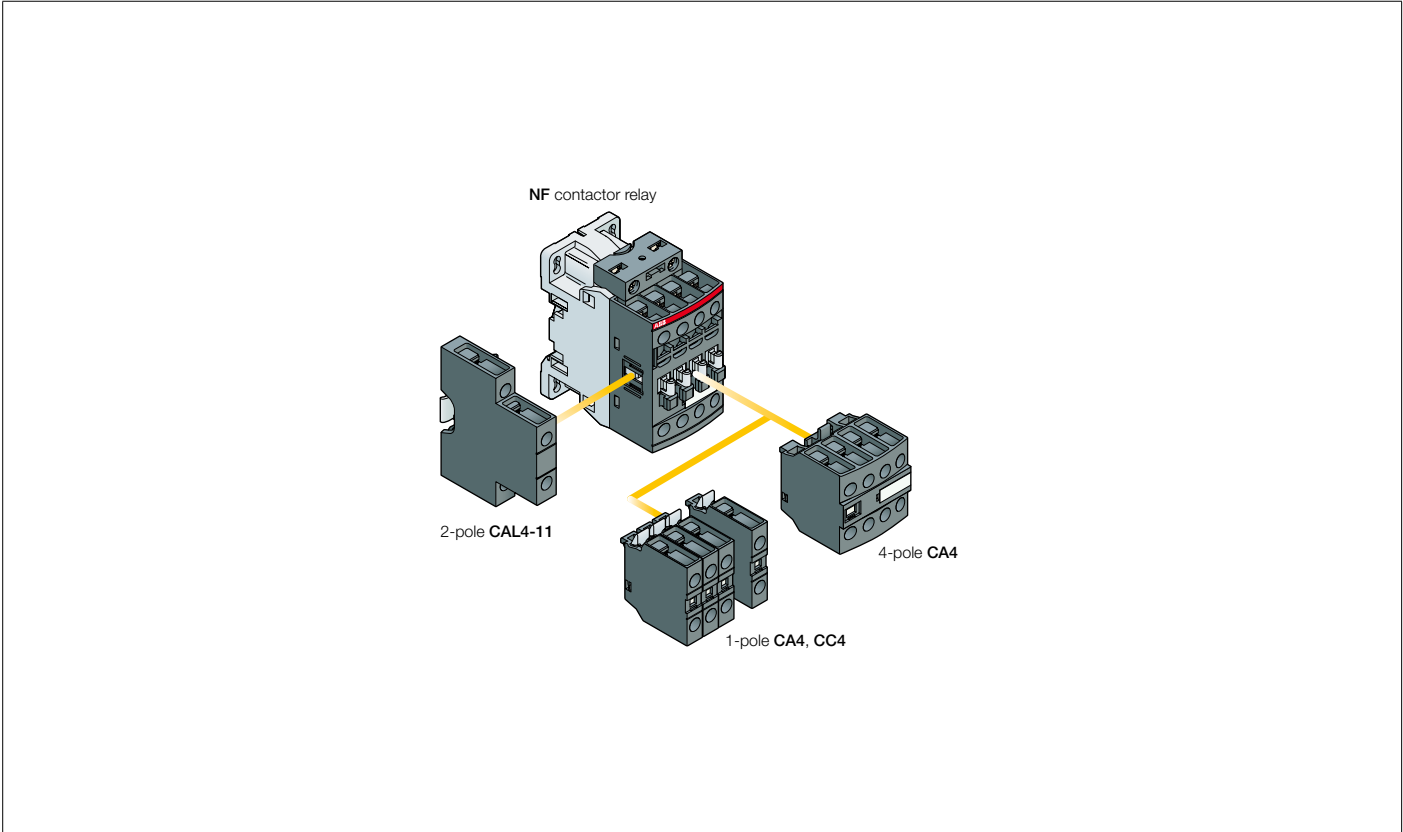
Main terminals			
		Screw terminals with cable clamp	
Connecting capacity (min. ... max.)			
Pole and coil terminals			
	Rigid	1 x	1 ... 2.5 mm²
		2 x	1 ... 2.5 mm²
	Flexible with non insulated ferrule	1 x	0.75 ... 2.5 mm²
		2 x	0.75 ... 2.5 mm²
	Flexible with insulated ferrule	1 x	0.75 ... 2.5 mm²
		2 x	0.75 ... 1.5 mm²
	Bars or lugs	L <	8 mm
Capacity according to UL/CSA		1 or 2 x	AWG 18 ... 14
Stripping length			10 mm
Degree of protection			
acc. to IEC 60947-1 / EN 60947-1 and IEC 60529 / EN 60529			
All terminals			IP20
Screw terminals			(delivered in open position, screws of unused terminals must be tightened)
All terminals			M3.5
Screwdriver type			Flat Ø 5.5 / Pozidriv 2
Tightening torque			
Pole terminals			1.2 Nm / 11 lb.in
Coil terminals			1.2 Nm / 11 lb.in

Accessory Fitting Details for a NF Contactor Relay

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.



Front-mounted accessories			Side-mounted accessories	
Auxiliary contact blocks			Auxiliary contact blocks	
1-pole CA4			Left side	Right side
1-pole CC4	4-pole CA4		2-pole CAL4-11	
-	-		1	-

Overview of main accessories (other accessories available)



Main Accessories

Ordering Details

Description		Auxiliary contacts	Type	Order code	EAN	Pack ^(ing) piece	Weight kg ^(1 pce)
Additional auxiliary contact blocks	Side-mounted instantaneous auxiliary contact blocks	 1 1 - -	CAL4-11	1SBN 010 120 R1011	3471523130043	1	0.040
		 1 1 - - -	CAL4-11-T	1SBN 010 120 T1011	3471523130418	10	0.040
Additional coil terminal block	Additional coil terminal block		LDC4	1SBN 070 156 T1000	3471523130678	10	0.010
Protective covers	Protective covers		BX4-CA	1SBN 110 109 W1000	3471523130715	50	0.001
Function markers	Function markers		BA4	1SNA 235 156 R2700	3472592351568	16	0.011
			HTP500-BA4	1SNA 235 712 R2400	3472592357126	1	0.220
			SPRC 1	1SNA 360 010 R1500	3472593600108	1	0.290

Standard devices without addition of auxiliary contacts



NF80E

NF80E

ABB | Technical Datasheet 1SBC101434D0201 7

Contact us

ABB France

Low Voltage Products Division

10, rue Ampère Z.I. - B.P. 114

F-69685 Chassieu cedex / France

**You can find the address of your local sales organisation
on the ABB home page**

<http://www.abb.com/contacts> -> Low Voltage products

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2011 ABB
All rights reserved