



ATSBT-BOTTOM-FM

Teletilt® Bottom Smart Bias Tee

- Injects AISG power and control signals onto a coaxial cable line
- Reduces cable and site lease costs by eliminating the need for AISG home run cables
- AISG 1.1 and 2.0 compliant
- Operates at 10-30 Vdc
- Weatherproof AISG connectors
- Intuitive schematics simplify and ensure proper installation
- Enhanced lightning protection plus grounding stud for additional surge protection
- 7-16 DIN male connector (ANT)
- 7-16 DIN female connector (BTS)

OBSOLETE

This product was discontinued on: **October 31, 2013**

Replaced By

ATSBT-BOTTOM-FM-4G Teletilt® Bottom Smart Bias Tee

General Specifications


Smart Bias Tee Type	10–30 V Bottom
Brand	Teletilt®
Operating Frequency Band	698 – 2180 MHz

Electrical Specifications

EU Certification	CE
Protocol	AISG 1.1 AISG 2.0
Antenna Interface Signal	AISG data dc RF
BTS Interface Signal	dc Blocked RF
Interface Protocol Signal	Data dc
Voltage Range	10–30 Vdc
VSWR Return Loss	1.17:1 22 dB, typical
RF Power, maximum	250 W @ 1850 MHz 500 W @ 850 MHz
Impedance	50 ohm
Insertion Loss, typical	0.3 dB
3rd Order IMD	-158.0 dBc (relative to carrier)
3rd Order IMD Test Method	Two +43 dBm carriers
Electromagnetic Compatibility (EMC)	CFR 47 Part 15, Subpart B, Class B EN 55022, Class B ICES-003 Issue 4 CAN/CSA-CEI/IEC CISPR 22:02

Mechanical Specifications


Antenna Interface	7-16 DIN Male
BTS Interface	7-16 DIN Female

ATSBT-BOTTOM-FM		POWERED BY 	
AISG Input Connector	8-pin DIN Male		
Color	Silver		
Grounding Lug Thread Size	M8		
Material Type	Aluminum		
Lightning Surge Capability	5 times @ -3 kA 5 times @ 3 kA		
Lightning Surge Capability Test Method	IEC 61000-4-5, Level X		
Lightning Surge Capability Waveform	1.2/50 voltage and 8/20 current combination waveform		

Environmental Specifications

Ingress Protection Test Method	IEC 60529:2001, IP66
Operating Temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Interface Port Drawing

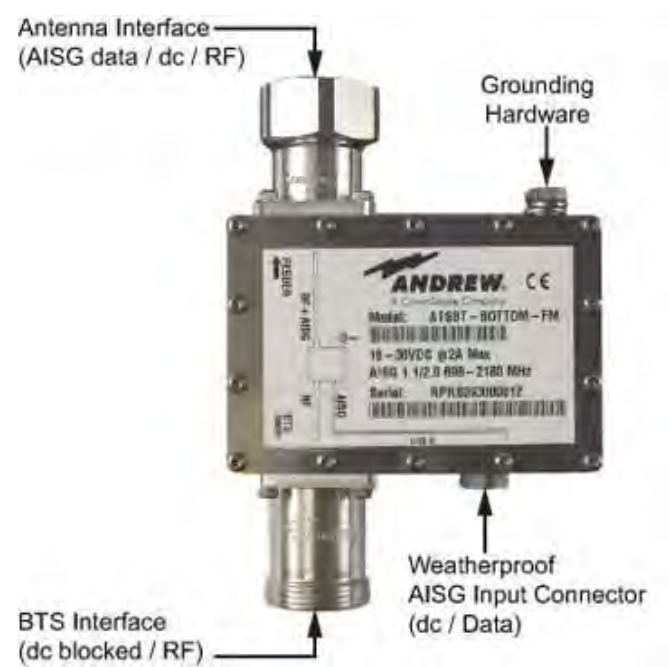

Dimensions

Width	94.0 mm 3.7 in
Depth	50.0 mm 2.0 in
Height	143.00 mm 5.63 in
Net Weight	0.8 kg 1.8 lb

Regulatory Compliance/Certifications

Agency	Classification
RoHS 2011/65/EU	Compliant by Exemption
China RoHS SJ/T 11364-2006	Above Maximum Concentration Value (MCV)

Product Specifications

COMMScope®

ATSBT-BOTTOM-FM

POWERED BY



ISO 9001:2008

Designed, manufactured and/or distributed under this quality management system

