


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

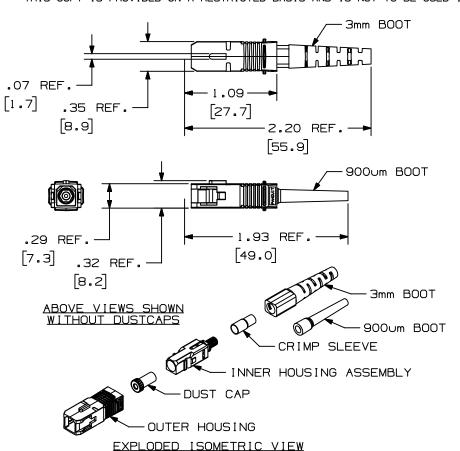

SCALE: .75 : 1

PANDUIT P/N	WE I GHT	FERRULE TYPE		
FSCM** FSCSBU	.090 LBS/10 PCS. (40.8 G/10 PCS.)	ZIRCONIA (CERAMIC)		

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
- MULTIMODE CONNECTORS (FSCM**) ACCEPT 50/125 OR 62.5/125 UM MULTIMODE GLASS OPTICAL FIBER.
- SINGLEMODE CONNECTORS (FSCSBU) ACCEPT 9/125 um SINGLEMODE GLASS OPTICAL FIBER.
- MATERIALS:
 - A. OUTER HOUSING: POLYETHERIMIDE
 - B. BOOTS: THERMOPLASTIC ELASTOMER
 - C. CRIMP SLEEVE: BRASS D. INNER HOUSING ASSEMBLY:
 - a. INNER HOUSING: POLYETHERIMIDE
 - b. SPRING: STAINLESS STEEL c. BACKBONE: BRASS

 - d. FERRULE HOLDER: BRASS
 - e. FERRULE: ZIRCONIA (CERAMIC)
- 5. COMPLIES WITH THE FIBER OPTIC PERFORMANCE REQUIREMENTS AS SPECIFIED IN TIA/EIA 568-A AND B.3
- 6. COMPLIES WITH FOCIS-3 (TIA/EIA 604-3)
- 7. DIMENSIONS IN PARENTHESIS ARE METRIC

										FIBER-OPTIC SC CONNECTOR CUSTOMER DRAWING			
										TINLEY PARK, ILL 60477			
											ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DRAWING FILENAME MO1069AA_DC_02A.prt		2A.prt
										THIRD ANGLE PROJECTION	(.X) ± .2 [5.1] (.XXX)±.010 [0.3] (.XX)±.03 [0.8] ANGLES ±1°	INOINE	
										DRAWN BY MC	REVIEW DRAWING NUMBERS	FSCM**/FS	CSBU
1	05-10-05	MYW		RELEASED TO PRODUCTION	01069-13					06-21-01	SEE NOTES	DRAWING NO.	SIZE
REV	DATE	ВҮ	СНК	DESCRIPTION	ECN -	· R	CUST	SUP	отн	снк¹¤ JJR	1	01069-13	ΙΑ