


EtherScope® nXG

Quick Start Guide



The EtherScope nXG is a rugged, hand-held tool for testing and analyzing copper, fiber, and Wi-Fi networks. It features applications developed by NetAlly for network discovery, measurement, and validation, which are available from the Android Home and Apps screens:

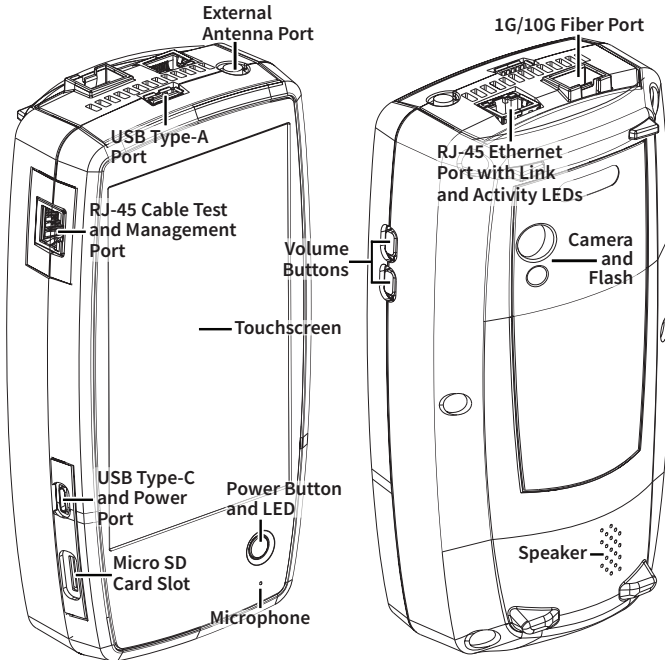

AutoTest – Verify your network layers 1 through 7 in seconds.



Ping/TCP – Validate and monitor responsiveness and connectivity.



Capture – Record Wired or Wi-Fi frames with filters.



Discovery – Identify and analyze all devices on your network.



Wi-Fi – Identify APs, SSIDs, clients, and channels from your location.



Path Analysis – Trace Layer 2 and 3 routes.



Performance – Measure up to four streams at 10G line rate.



iPerf – Test Wired or Wi-Fi connections to a NetAlly Test Accessory or server.



Link-Live – Upload, manage, and analyze results and data in the Cloud.



Cable Test – Determine length, status, and wiremapping, and employ toning.



NetAlly App Store – Download third-party Android applications to use on your EtherScope nXG.

Power Up and Connect

Your EtherScope nXG includes a USB-C 15V/3A (45 W) power adapter. Other USB-C power adapters are not supported. EtherScope nXG can also charge via 802.3at (25 W) PoE using the top RJ-45 port.

- To begin charging the internal battery, plug the included power adapter into the left-side USB-C port. The unit will fully charge in 2-3 hours via AC power. The power LED button turns red when the unit is charging and off at full charge. Press it briefly to view the battery level on the screen.
- To fully start up the EtherScope nXG, hold down the power button for approximately one second. The power button LED is green when the unit is powered on.
- For wired testing capabilities, connect your EtherScope nXG to a network using the RJ-45 Ethernet port or Fiber port on the top of the unit.


Start Testing

When you power on the EtherScope nXG, the AutoTest, Discovery, and Wi-Fi apps begin collecting any available wired and Wi-Fi data from your network in the background. Open **Discovery** or **Wi-Fi** to view discovered devices on your networks, or open **AutoTest** and the default “Wired Profile” for wired connection tests.

An AutoTest “Profile” is a series of tests and their saved settings, which the AutoTest app uses to connect to networks or scan and measure Wi-Fi channel utilization. After running a profile, you can touch the individual test cards to view more details, retest, or open other apps for further analysis.

For more options, tap the Floating Action Button (FAB)  at the lower right corner of app screens.


Touch the Menu button  or Settings button  to configure apps and tests for your network.


To return Home and open other apps, tap the home button  at the bottom of the screen.


Navigate the Android Interface

The EtherScope nXG touchscreen supports many of the operations typical of any Android device. Use dragging and swiping motions to navigate through apps, open side menus, drag down the notification panel from the top, and drag up the Apps screen from the bottom of the Home screen.

The main navigation buttons are always shown at the very bottom of the touchscreen:

 The back icon returns to the previous screen.

 The circle icon opens the Home screen.


 The square icon displays your recently used applications for easily switching between them.

The Android operating system also allows you to add third-party apps from the NetAlly App Store. To download these curated apps, first visit our Link-Live website, and claim your unit.

Connect to Link-Live

Link-Live Cloud Service is a free, online system for collecting, organizing, analyzing, and reporting your test results. Test data is automatically uploaded once your EtherScope nXG is “claimed” to Link-Live and properly configured.

To start, create a user account at Link-Live.com, and sign in.

The first time you sign in, a pop-up window prompts you to claim a device. If you already have other devices claimed, go to the **Units** page from the left-side menu, and select the **Claim Unit** button  at the lower right corner of the page.

Then, select the EtherScope nXG image, and follow the claiming instructions on the Link-Live website. On your EtherScope nXG Home screen, open the Link-Live App, and touch **CLAIM NOW**.

To learn more about using Link-Live, open **Support** from the left-side menu on the website.

Other Helpful URLs

NetAlly.com/Products/EtherScope for product information

NetAlly.com/Registration to register your product

NetAlly.com/Support for technical assistance



PN 770-000034 07/2019

© 2019 NetAlly